

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
14 March 2002 (14.03.2002)


PCT

(10) International Publication Number  
WO 02/21771 A1

- (51) International Patent Classification<sup>7</sup>: H04L 12/00
- (21) International Application Number: PCT/US01/27413
- (22) International Filing Date:  
4 September 2001 (04.09.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/230,759 7 September 2000 (07.09.2000) US  
09/931,344 16 August 2001 (16.08.2001) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier applications:  
US 60/230,759 (CIP)  
Filed on 7 September 2000 (07.09.2000)  
US 09/931,344 (CIP)  
Filed on 16 August 2001 (16.08.2001)
- (71) Applicant (for all designated States except US): MAZU NETWORKS, INC. [US/US]; 6th Floor, 125 Cambridge Park Drive, Cambridge, MA 02140 (US).
- (72) Inventors; and  
(75) Inventors/Applicants (for US only): POLETTI, Massimiliano, Antonio [IT/US]; 474 Broadway 6, Cambridge, MA 02138 (US). KOHLER, Edward, W., Jr. [US/US]; 805 57th Street, Oakland, CA 94608 (US).
- (74) Agent: MALONEY, Dennis, G.; Fish & Richardson P.C., 225 Franklin Street, Boston, MA 02110-2804 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,

[Continued on next page]

(54) Title: DEVICE TO PROTECT VICTIM SITES DURING DENIAL OF SERVICE ATTACKS

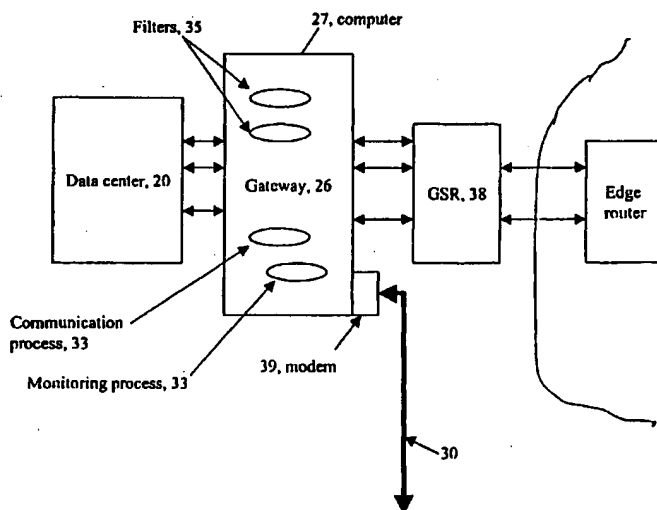

(57) Abstract: A system architecture for thwarting denial of service attacks on a victim (12) data center (20a-20c) is described. The system includes a first plurality of monitors that monitor network traffic flow through the network. The first plurality of monitors is disposed at a second plurality of points in the network. The system includes a central controller that receives data from the plurality of monitors, over a hardened, redundant network (30). The central controller analyzes network traffic statistics to identify malicious network traffic. In some embodiments of the system, a gateway (26) device is disposed of pass network packets between the network and the victim site. The gateway (26) is disposed to protect the victim site, and is coupled to the control center (24) by the redundant hardened network (30).

WO 02/21771 A1



CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

DEVICE TO PROTECT VICTIM SITES DURING  
DENIAL OF SERVICE ATTACKS

5

Background

This invention relates to techniques to thwart network-related denial of service attacks.

In denial of service attacks, an attacker sends a large volume of malicious traffic to a victim. In one approach an attacker, via a computer system connected to the Internet infiltrates one or a plurality of computers at various data centers. Often the attacker will access the Internet through an Internet Service Provider (ISP). The attacker by use of a malicious software program places the plurality of computers at the data centers under its control. When the attacker issues a command to the computers at the data centers, the machines send data out of the data centers at arbitrary times. These computers can simultaneously send large volumes of data over various times to the victim preventing the victim from responding to legitimate traffic.

Summary

According to an aspect of the present invention, a gateway device disposed between a data center and a network for thwarting denial of service attacks on the data center, the gateway device includes a computing device. The computing device includes a monitoring process that monitors network traffic through the gateway and a communication process that can communicate statistics collected in the gateway from the monitoring process with a control center and that can receive queries or instructions from the control center. The computing device also includes a filtering process to allow filters

to be inserted to filter out packets that the gateway deems to be part of an attack.

According to an additional aspect of the present invention, a method of protecting a victim site during a denial of service attack, includes disposing a gateway device between the victim site and a network and monitoring network traffic through the gateway. The method also includes measuring heuristics of the network traffic and communicating statistics collected in the gateway to a control center. The method also includes filtering out packets that the gateway or control center deems to be part of an attack.

According to an additional aspect of the present invention, a computer program product residing on a computer readable medium for protecting a victim site during a denial of service attack, comprises instructions for causing a computer device coupled at an entry to the site to monitor network traffic sent to the victim site and measuring heuristics of the network traffic. The program also includes instructions to communicate statistics collected in the computer device to a control center and filter out packets that the device or control center deems to be part of an attack.

One or more aspects of the invention may provide some or all of the following advantages.

Aspects of the invention provide a distributed rather than a point solution to thwarting denial of service attacks. The technique can stop attacks near their source, protecting the links between the wider Internet and the attacked data center as well as devices within the data center. The gateway device can tap a network line without being deployed physically in line. Or the gateway device can also forward network traffic by being disposed

in line. The gateway can filter malicious traffic if in-line, or can dynamically install filters on nearby routers. The gateway monitors traffic and can discard packets that the gateway deems to be part of an attack, as  
5 determined by heuristics.

#### Brief description of the drawings

FIG. 1 is a block diagram of networked computers showing an architecture to thwart denial of service  
10 attacks.

FIG. 2 is a block diagram depicting details of placement of a gateway.

FIG. 3 is a block diagram depicting details of placement of data collectors.

15 FIG. 4 is flow chart depicting a data collection process.

FIG. 5 is a flow chart depicting details of a control center.

FIG. 6 is a diagram depicting functional layers of a  
20 monitoring process.

FIG. 7 is a diagram depicting one technique to gather statistics for use in algorithms that determine sources of an attack.

FIG. 8 is a diagram depicting an alternative  
25 technique to gather statistics for use in algorithms that determine sources of an attack.

FIG. 9 is flow chart depicting a process to determine receipt of bad TCP traffic.

FIG. 10 is flow chart depicting a process to defend  
30 against setup time connection attacks.

## Detailed Description

Referring to FIG. 1, an arrangement 10 to thwart denial of service attacks (DoS attacks) is shown. The arrangement 10 is used to thwart an attack on a victim data center 12, e.g., a web site or other network site under attack. The victim 12 is coupled to the Internet 14 or other network. For example, the victim 12 has a web server located at a data center (not shown).

10 An attacker via a computer system 16 that is connected to the Internet e.g., via an Internet 14 Service Provider (ISP) 18 or other approach, infiltrates one or a plurality of computers at various other sites or data centers 20a-20c. The attacker by use of a malicious  
15 software program 21 that is generally surreptitiously loaded on the computers of the data centers 20a-20c, places the plurality of computers in the data centers 20a-20c under its control. When the attacker issues a command to the data centers 20a-20c, the data centers 20a-20c send  
20 data out at arbitrary times. These data centers 20a-20c can simultaneously send large volumes of data at various times to the victim 12 to prevent the victim 12 from responding to legitimate traffic.

The arrangement 10 to protect the victim includes a  
25 control center 24 that communicates with and controls gateways 26 and data collectors 28 disposed in the network 14. The arrangement protects against DoS attacks via intelligent traffic analysis and filtering that is distributed throughout the network. The control center 24  
30 is coupled to the gateways 26 and data collectors 28 by a hardened, redundant network 30. Gateways 26 and data collectors 28 are types of monitors that monitor and collect statistics on network traffic. In preferred

embodiments, the network is inaccessible to the attacker. The gateway 26 devices are located at the edges of the Internet 14, for instance, at the entry points of data centers. The gateway devices constantly analyze traffic, 5 looking for congestion or traffic levels that indicate the onset of a DoS attack. The data collectors 28 are located *inter alia* at major peering points and network points of presence (PoPs). The data collectors 28 sample packet traffic, accumulate, and collect statistical information 10 about network flows.

All deployed devices e.g., gateways 26 and data collectors 28 are linked to the central control center. The control center aggregates traffic information and coordinates measures to track down and block the sources 15 of an attack. The arrangement uses a distributed analysis emphasizing the underlying characteristics of a DoS attack, i.e., congestion and slow server response, to produce a robust and comprehensive DoS solution. Thus, this architecture 10 can stop new attacks rather than some 20 solutions that can only stop previously seen attacks. Furthermore, the distributed architecture 10 will frequently stop an attack near its source, before it uses bandwidth on the wider Internet 14 or congests access links to the targeted victim 12.

25 A virus is one way to get attacks started. When surfing the web page a user may download something, which contains a virus that puts the user's computer under the control of some hacker. In the future, that machine can be one of the machines that launches the attack. The 30 attacker only needs a sufficient amount of bandwidth to get a sufficient number of requests out to the victim 12 to be malicious.

Referring to FIG. 2, details of an exemplary deployment of a gateway is shown. Other deployments are possible and the details of such deployments would depend on characteristics of the site, network, cost and other considerations. The gateway 26 is a program executing on a device, e.g., a computer 27 that is disposed at the edge of the data center 20 behind an edge router at the edge of the Internet 14. Additional details on the gateway 26 are discussed below and in the APPENDIX A. In a preferred embodiment, a plurality of gateway devices are deployed at a corresponding plurality of locations, e.g., data centers or sites over the network, e.g., the Internet 14. There can be one gateway or a plurality of gateways at each data center, but that is not necessarily required.

The gateway 26 includes a monitoring process 32 (FIG. 6B) that monitors traffic that passes through the gateway as well as a communication process 33 that can communicate statistics collected in the gateway 26 with the data center 24. The gateway uses a separate interface over a private, redundant network, such as a modem 39 to communicate with the control center 24 over the hardened network 30. Other interface types besides a modem are possible. In addition, the gateway 26 can include processes 35 to allow an administrator to insert filters to filter out, i.e., discard packets that the device deems to be part of an attack, as determined by heuristics described below.

An attack can be designed to either overload the servers or overload some part of the network infrastructure inside the victim site 12. Thus, the victim site 12 can include routers, switches, load balancers and other devices inside the data center that can be targeted by the attack. A particularly troublesome



attack causes overload of upstream bandwidth. Upstream bandwidth is the capacity between the victim 12 data center 12a and one or a plurality of routers or switches belonging to the victim 12 data center's network service provider, which provides connectivity to the rest of the network, e.g., the Internet.

For an exemplary configuration, the victim site 12 can include a plurality of high bandwidth lines feeding a GSR (Gigabit Switch Router). At the output of the GSR are exit ports to various parts of the data center. The GSR is generally very high bandwidth and generally does not crash. The gateway 26 is placed behind the GSR and across some or all of the output ports of the GSR into the data center. This configuration allows the gateway 26 to monitor and control some or all of the traffic entering the data center without the need to provide routing functionality.

Alternatively, a gateway 26 can tap a network line without being deployed physically in line, and it can control network traffic, for example, by dynamically installing filters on nearby routers. The gateway 26 would install these filters on the appropriate routers via an out of band connection, i.e. a serial line or a dedicated network connection. Other arrangements are of course possible.

Referring to FIG. 3, data collectors 28 are shown coupled to the network to tap or sample traffic from data centers 20a-20c. Although data collectors 28 can be dispersed throughout the network 14 they can be strategically disposed at peering points, i.e., points where network traffic from two or more different backbone providers meet. The data collectors 28 can also be disposed at points of presence (PoPs). The data

collectors 28 monitor and collect information pertaining to network traffic flow. The data collectors process statistics based on monitored network traffic that enters a peering point. Data collectors 28 include a monitoring  
5 process 32 (FIG. 6) as well as a communication process that communicates data to the control center over the hardened network 30. One or more data collector devices 28 use the monitoring process to monitor one or more lines that enter the peering point. Each data collector 28  
10 would be able to monitor one or more lines depending on the specifics of how the network is configured and bandwidth requirements.

The gateway 26 and data collector 26 are typically software programs that are executed on devices such as  
15 computers, routers, or switches. In one arrangement, packets pass through the gateway 26 disposed at the data center 22a and are sampled by the data collector.

Referring to FIG. 4, the data collector 26 performs  
40 a sampling and statistic collection process 40. The data collector samples 42 one (1) packet in every (n) packets and has counters to collect statistics about every packet. The data collector 26 parses the information in the sampled packet. Information collected includes source information 44, which may be fake or spoofed, e.g., not  
25 correct information. It will also include destination information 46, which generally is accurate information. The data collector 28 collects that information but need not log the sampled packets. The data collector 28 maintains a log over a period of time, e.g., in the last  
30 hour. As an example, the log that the data collector 26 maintains is a log that specifies that the data collector has seen a certain number of packets, e.g., 10,000 packets of a particular kind, that apparently originated from a

particular source(s) that are going to a particular destination.

Based on rules 48 within the data collector 26, the data collector 26 analyzes 50 the collected statistics and may if necessary compose 52 a message that raises an alarm. Alternatively, the data collector can respond to queries concerning characteristics of traffic on the network. Typically, the queries can be for information pertaining to statistics. It can be in the form of an answer to a question e.g., how many packets of a type did the data collector see or it can be a request to down load via the hardened network, the entire contents of the log. One rule is that when the data collector 26 starts sampling, the data collector periodically logs data and produces a log of a large plurality of different network flows over a period of time.

Referring to FIG. 5, a deployment for the control center 24 is shown. The control center 24 receives information from one or more gateways 26 and data collectors 28 and performs appropriate analysis using an analysis process 62. The control center is a hardened site.

The control center 24 has multiple upstream connections so that even during an attack it will have other ways to couple to the network 30. Several approaches can be used to harden the site. One approach can use special software between the site and the Internet 14 to make it immune to attack. An approach is to have a physically separate network 30 connected to all of the devices, e.g., gateways 26 and data collectors 28. One exemplary embodiment of that physically separate network 30, which is hardened, is the telephone system. Thus, each one of the data collectors 26 and gateways 26

includes an interface to the separate network, e.g., a modem. The data center 26 also includes a corresponding interface to the separate network, e.g., a modem or a modem bank 60.

5       With this approach, the redundant network 30 is not accessible to the attacker. The redundant network 30 thus is available to communicate between the data center 24 and data collectors and gateways to coordinate response to an attack. In essence, the network 30 used by the data  
10 center to communicate with the data collectors 26 and gateways 26 is not available to the attacker. Alternatively, if less than complete assurance is required, the control center could be resistant to attack and still be connected to the Internet 14.

15       The analysis process 62 that is executed on the control center 24 analyzes data from the gateways 26 and data collectors 28. The analysis process 62 tries to detect attacks on victim sites. The analysis process 62 views attacks as belonging to, e.g., one of three classes  
20 of attack. Herein these classes of attack are denoted as low-grade with spoofing, low-grade without spoofing and high-grade whether spoofing or non-spoofing.

A low-grade attack is an attack that does not take out upstream bandwidth. A low-grade attack does not  
25 significantly overburden the links between the Internet 14 and the victim data center 12. The low-grade non-spoofing attack is the simplest type of attack to defend against. It simply requires identifying the source of the attack and a mechanism to notify an administrator at the victim  
30 site to install a filter or filters at appropriate points to discard traffic containing the source address associated with the attack.

With a low-grade spoofing-type attack, an attacker sends an IP-packet to a destination but fakes the source address. There is no way to enforce use of an accurate source address by a sender. During a spoofing attack, 5 each one of the attacking machines will send a packet with a fake, e.g., randomly selected or generated source address. Under this type of attack, the victim 12 alone cannot thwart the attack. An administrator at the victim 12 can try to put a filter on a router to stop the 10 packets. However, there is no way for the administrator to guess what the random address of the next packet will be.

The control center 24 also includes a communication process 63 to send data to/from the gateways 26 and data 15 collectors 28. The gateway 26 at the victim 12 contacts the control center and notifies the control center 24 that the victim 12 data center is under a spoofing attack. The gateway 26 identifies itself by network address (e.g., static IP address if on the Internet 14), via a message to 20 the control center 24. The message sent over the hardened network 30 indicates the type of attack, e.g., an attack from addresses that the victim 12 cannot stop because it is a spoofing type of attack. The control center queries data collectors 28 and asks which data collectors 28 are 25 seeing suspicious traffic being sent to the victim 12.

The packets from the attacker will have faked source addresses that will be changing with time. However, the control center can issue a query for this kind of packet by victim destination address. The data collectors 28 30 reply with the information collected. Based on that collected information from the data collectors 28, the control center can then determine what data centers are performing the spoofing on the victim 12.

In the present configuration, there are two possible sources of attack traffic: either the attacker is behind a gateway 26 or not. If the attacker is behind a gateway 26, the control center issues a request to the appropriate gateway 26 to block the attacking traffic, e.g. by  
5 allowing the appropriate gateway 26 to discard traffic, e.g., packets that contain the victim 12 destination address. The gateway 26 stops that traffic in a transparent manner. If the attacker is not behind a  
10 gateway 26, data collectors 28 are used to provide information about possible locations of the attackers. The availability of information from data collectors 28 increases the speed with which attackers are discovered. The data collectors 28 are positioned at network switching  
15 points that see a high volume of traffic, which minimizes the required number of deployed data collectors.

The high-grade attacks are attacks that take out the link between the victim 12 data center and the Internet 14. With a high-grade attack it does not matter whether  
20 the victim 12 is spoofed or not. Under a high-grade attack, the attack requires cooperation just like the low grade spoofing attack. Thus, the same thwarting mechanism is used for either spoofing or non-spoofing, e.g., using information from the data collectors 28 to identify  
25 attacking networks. This information is used to either automatically shutdown traffic having the victim's destination address at the appropriate gateways 26 or is used to identify networks or data centers from which the attack is originating and to follow up with calls to the  
30 appropriate administrators.

Referring to FIG. 6, a monitoring process 32 is shown. The monitoring process 32 can be deployed on data collectors 28 as well as gateways 26. The monitoring

process 32 includes a process 32a to collect statistics of packets that pass by the data collectors 28 or through the gateways 26. The monitoring process 32 also includes several processes 32b to identify, malicious traffic flows  
5 based on the collected statistics as further described below.

Referring to FIG. 7, the gateways 26 and data collectors 28 are capable of looking at multiple levels of granularity. The gateways 26 and data collectors have  
10 monitoring process 32 used to measure some parameter of traffic flow. One goal of the gateways 26 and data collectors 28 is to measure some parameter of network traffic. This information collected by the gateways 26 and data collectors is used to trace the source of an  
15 attack.

One of the algorithms to measure parameters of traffic flow divides the traffic flow into buckets. For example, consider one simple parameter, the count of how many packets a data collector or gateway examines. An  
20 algorithm to track the count of this parameter starts with a predefined number of buckets, e.g., "N" buckets. The buckets are implemented as storage areas in the memory space of the data collector or gateway device. The algorithm will use some hash function "f(h)", which takes  
25 the packet and outputs an integer that corresponds to one of the buckets "B<sub>1</sub> - B<sub>N</sub>". Statistics from the packets start accumulating in the buckets "B<sub>1</sub> - B<sub>N</sub>". The buckets "B<sub>1</sub> - B<sub>N</sub>" are configured with threshold values "Th." As the contents of the buckets B<sub>1</sub> - B<sub>N</sub> reach the configured  
30 thresholds values "Th", (e.g., compare values of packet count or packet rate to threshold), the monitoring process 32 deems that event to be of significance. The monitoring process 32 takes that bucket, e.g., B<sub>1</sub> and divides that

bucket  $B_i$  into some other number  $M$  of new buckets  $B_{i1} - B_{iM}$ . Each of the new buckets  $B_{i1} - B_{iM}$  contains values appropriately derived from the original bucket  $B_i$ . Also, the hash function is extended to map to  $N+M-1$  "h- $N+M-1$ " values, rather than the original  $N$  values.

An attack designed to use the algorithm of FIG. 6 against a gateway 26 or a data collector 28 might send packets in such a fashion as to explode the number of buckets. Since each bucket consumes memory space, the attack can be designed to consume all available memory and crash the device, e.g., computer on which the monitoring process 32 executes. There are ways of preventing that type of attack on the monitoring process 32. One way is to make the hash function change periodically, e.g., randomly. Also the hash function is secret so that the packets are reassigned to different buckets in ways unknown to the attackers.

Referring to FIG. 8, a second method is that instead of using just thresholds and values inside a given bucket, the monitoring process 32 also sets thresholds on the number of buckets. As the gateway 26 or data collector 28 approaches a bucket threshold "Th", the gateway 26 or data collector 28 have the ability to take several buckets  $B_1 - B_3$  and divide them in more buckets  $B_1 - B_4$  or combine them into fewer bucket  $B_1 - B_2$ .

The function of the variable number of buckets is to dynamically adjust the monitoring process to the amount of traffic and number of flows, so that the monitoring device (e.g., gateway 26 or data collector 28) is not vulnerable to DoS attacks against its own resources. The variable number of buckets also efficiently identifies the source(s) of attack by breaking down traffic into



different categories (buckets) and looking at the appropriate parameters and thresholds in each bucket.

Thus, with multi-level analysis as discussed in FIGS. 6 and 7, traffic is monitored at multiple levels of granularity, from aggregate to individual flows. Multi-level analysis can be applied to all types of monitoring (i.e. TCP packet ratios, repressor traffic, etc. discussed below) except TCP SYN proxying (because the latter requires per-connection monitoring of all half-open connections as discussed below).

The monitoring process 32 has the gateway 26 or the data collectors 28 keep track of a metric (such as packet ratio) for each of  $n$  traffic buckets. (If  $n=1$ , the monitoring process 32 tracks the metric for all traffic in the aggregate.) The monitoring process 32 places packets into buckets according to a hash function of the source or destination address. If the metric in any bucket exceeds a given "suspicious" threshold, that bucket is split into several smaller buckets, and the metric is tracked individually for each new bucket. In the limit, each bucket can correspond to a single flow (source address/port and destination address/port pair). The resulting per-flow monitoring is resilient to denial-of-service attacks. If the number of buckets exceeds a given memory limit (for example, due to a many-flow spoofing attack), several fine-grain buckets can be aggregated into a single coarse-grain bucket. The hash function for placing packets into traffic buckets is secret and changes periodically, thwarting attacks based on carefully chosen addresses.

In the worst case, an attacker actually spoofs packets from all possible addresses. An IP address, for example is 32 bits long. This address length allows for

approximately 4 billion possible random addresses and makes it impossible for the gateway at the victim site 12 to identify the attacker. In that worst case, the gateway 26 calls the control center, indicates the address of the gateway 26, and conveys that the gateway 26 is receiving unreasonably high levels of random traffic. The control center 24 contacts the data collectors 28. The control center 24 analyzes the statistics collected by the data collectors 28 to try to determine the source of the traffic.

Egress filtering is a recommended Internet 14 best practice procedure that does not allow any packets out of a network unless the source address belongs to that network. Egress filtering prevents hosts on that network from sending out packets with completely random source addresses. Rather, the space of usable fake addresses is limited by the size of the host's network address space, and may range up to 24 bits rather than the full 32 bits. If an attacker is attacking from a network that performs egress filtering, then all the attack traffic reaching a victim will fall into a smaller number of buckets, those corresponding to the source network address. In this way, the gateway 26 can identify the approximate source of the attack without necessarily relying on the control center or data collectors.

Several methods can be used separately or in combination to identify, malicious traffic flows. For example, the gateway 26 can detect DoS attacks and identify malicious flows or source addresses using at least one or more of the following methods including: analyzing packet ratios of TCP-like traffic; analyzing "repressor" traffic for particular types of normal traffic; performing TCP handshake analysis; performing

various types of packet analysis at packet layers 3-7; and logging/historical analysis.

Packet ratios for TCP-like traffic.

5       The Transmission Control Protocol (TCP) is a protocol in which a connection between two hosts, a client C, e.g. a web browser, and a server S, e.g. a web server, involves packets traveling in both directions, between C and S and between S and C. When C sends data to S and S receives  
10 it, S replies with an ACK ("acknowledgement") packet. If C does not receive the ACK, it will eventually try to retransmit the data to S, to implement TCP's reliable delivery property. In general, a server S will acknowledge (send an ACK) for every packet or every second  
15 packet.

Referring to FIG. 9, the monitoring process in the gateway 26 can examine 82 a ratio of incoming to outgoing TCP packets for a particular set of machines, e.g. web servers. The monitoring process can compare 84 the ratio  
20 to a threshold value. The monitoring process can store 86 this ratio, time stamp it, etc. and conduct an ongoing analysis 88 to determine over time for example how much and how often it exceeds that ratio. As the ratio grows increasingly beyond 2:1, it is an increasing indication  
25 that the machines are receiving bad TCP traffic, e.g. packets that are not part of any established TCP connection, or that they are too overloaded to acknowledge the requests. This ratio is one of the parameters measured using the multiple-bucket algorithm described  
30 previously.

The gateway 26 divides traffic into multiple buckets, e.g. by source network address, and tracks the ratio of ingoing to outgoing traffic for each bucket. As the ratio

for one bucket becomes skewed, the gateway 26 may subdivide that bucket to obtain a more detailed view. The gateway 26 raises 90 a warning or alarm to the data center 24 and/or to the administrators at the victim site 12.

5

#### Repressor traffic

The phrase "repressor traffic" as used herein refers to any network traffic that is indicative of problems or a potential attack in a main flow of traffic. A gateway 26  
10 may use repressor traffic analysis to identify such problems and stop or repress a corresponding attack.

One example of repressor traffic is ICMP port unreachable messages. These messages are generated by an end host when it receives a packet on a port that is not  
15 responding to requests. The message contains header information from the packet in question. The gateway 26 can analyze the port unreachable messages and use them to generate logs for forensic purposes or to selectively block future messages similar to the ones that caused the  
20 ICMP messages.

#### TCP handshake analysis

A TCP connection between two hosts on the network is initiated via a three-way handshake. The client, e.g. C,  
25 sends the server, e.g. S, a SYN ("synchronize") packet. S the server replies with a SYN ACK ("synchronize acknowledgment") packet. The client C replies to the SYN ACK with an ACK ("acknowledgment") packet. At this point, appropriate states to manage the connection are  
30 established on both sides.

During a TCP SYN flood attack, a server is sent many SYN packets but the attacking site never responds to the corresponding SYN ACKs with ACK packets. The resulting

"half-open" connections take up state on the server and can prevent the server from opening up legitimate connections until the half-open connection expires, which usually takes 2-3 minutes. By constantly sending more SYN  
5 packets, an attacker can effectively prevent a server from serving any legitimate connection requests.

Referring to FIG. 10, in an active configuration, a gateway 26 can defend against SYN flood attacks. During connection setup, the gateway forwards 102 a SYN packet  
10 from a client to a server. The gateway forwards 104 a resulting SYN ACK packet from a server to client and immediately sends 106 ACK packet to the server, closing a three-way handshake. The gateway maintains the resulting connection for a timeout period 108. If the ACK packet  
15 does not arrive from client to server 110, the gateway sends 112 a RST ("reset") to the server to close the connection. If the ACK arrives 114, gateway forwards 116 the ACK and forgets 118 about the connection, forwarding subsequent packets for that connection. A variable  
20 timeout 120 period can be used. The variable time out period can be inversely proportional to number of connections for which a first ACK packet from client has not been received. If gateway 26 is placed inline in the network, when number of non-ACK'ed connections reaches a  
25 configurable threshold 122, the gateway will not forward any new SYNs until it finishes sending RSTs for those connections.

In a passive configuration, a gateway 26 can similarly keep track of ratios of SYNs to SYN ACKs and SYN  
30 ACKs to ACKs, and raise appropriate alarms when a SYN flood attack situation occurs.

Layer 3-7 analysis.

With layer 3-7 analysis, the gateway 26 looks at various traffic properties at network packet layers 3 through 7 to identify attacks and malicious flows. These layers are often referred to as layers of the Open System Interconnection (OSI) reference model and are network, transport, session, presentation and application layers respectively. Some examples of characteristics that the gateway may look for include:

1. Unusual amounts of IP fragmentation, or fragmented IP packets with bad or overlapping fragment offsets.
2. IP packets with obviously bad source addresses, or ICMP packets with broadcast destination addresses.
3. TCP or UDP packets to unused ports.
4. TCP segments advertizing unusually small window sizes, which may indicate load on server, or TCP ACK packets not belonging to a known connection.
5. Frequent reloads that are sustained at a rate higher than plausible for a human user over a persistent HTTP connection.

20

#### Logging and historical traffic analysis

The gateways 26 and data collectors 28 keep statistical summary information of traffic over different periods of time and at different levels of detail. For example, a gateway 26 may keep mean and standard deviation for a chosen set of parameters across a chosen set of time-periods. The parameters may include source and destination host or network addresses, protocols, types of packets, number of open connections or of packets sent in either direction, etc. Time periods for statistical aggregation may range from minutes to weeks. The device will have configurable thresholds and will raise warnings

when one of the measured parameters exceeds the corresponding threshold.

The gateway 26 can also log packets. In addition to logging full packet streams, the gateway 26 has the capability to log only specific packets identified as part of an attack (e.g., fragmented UDP packets or TCP SYN packets that are part of a SYN flood attack). This feature of the gateway 26 enables administrators to quickly identify the important properties of the attack.

10

#### Building a DoS-resistant network

The network of gateways 26, data collectors 28, and control center 24 are made DoS resistant by combining and applying several techniques. These techniques include the use of SYN cookies and "hashcash" to make devices more resistant to SYN floods and other attacks that occur at connection setup time. Also, the data center can use authentication and encryption for all connections. Private/public key pairs are placed on machines before deployment to avoid man-in-the-middle attacks. The control center 24 can have multiple physical connections from different upstream network service providers. The network over which the data center communicates between gateways and data collectors is a private redundant network that is inaccessible to attackers.

25

Information exchange between gateways/data collectors and the control center is efficient by transferring only statistical data or minimal header information, and by compressing all data.

30

This application includes an APPENDIX A attached hereto and incorporated herein by reference. APPENDIX A includes Click code for monitor software.

This application also includes an APPENDIX B attached hereto and incorporated herein by reference. APPENDIX B sets out additional modules for a Click Router that pertains to thwarting DoS attacks. "Click" is a modular software router system developed by The Massachusetts Institute of Technology's Parallel and Distributed Operating Systems group. A Click router is an interconnected collection of modules or elements used to control a router's behavior when implemented on a computer system.

Other embodiments are within the scope of the appended claims.



## APPENDIX A

```

network monitor/defender
//
5 // Has two operating modes: if MONITOR is defined, it monitors the network
// instead of defending against DDoS attacks.
//
// ICMP_RATE specifies how many ICMP packets allowed per second. Default is
// 500. UDP_NF_RATE specifies how many non-fragmented UDP (and other non-
10 TCP
// non-ICMP) packets allowed per second. Default is 3000. UDP_F_RATE specifies
// how many fragmented UDP (and other non-TCP non-ICMP) packets allowed per
// second. Default is 1000. All the SNIFF rates specify how many bad packets
// sniffed per second.
15 //
// For example, if MONITOR is not defined, and all SNIFF rates are 0, then the
// configuration defends against DDoS attacks, but does not report bad
// packets.
//
20 // can read:
// - tcp_monitor: aggregate rates of different TCP packets
// - ntcp_monitor: aggregate rates of different non TCP packets
// - icmp_unreach_counter: rate of ICMP unreachable pkts
// - tcp_ratemon: incoming and outgoing TCP rates, grouped by non-local hosts
25 // - ntcp_ratemon: incoming UDP rates, grouped by non-local hosts
//
// Note: handles full fast ethernet, around 134,500 64 byte packets, from
// attacker.
//
30 //
// TODO:
// - fragmented packet monitor

#ifdef ICMP_RATE
35 #define ICMP_RATE      500
#endif

#ifdef UDP_NF_RATE
40 #define UDP_NF_RATE    2000
#endif

#ifdef UDP_F_RATE
#define UDP_F_RATE      1000
#endif
45
#ifdef SUSP_SNIFF
#define SUSP_SNIFF      100 // # of suspicious pkts sniffed per sec

```

```

#endif

#ifdef TCP_SNIFF
#define TCP_SNIFF 100 // # of TCP flood pkts sniffed per sec
5  #endif

#ifdef ICMP_SNIFF
#define ICMP_SNIFF 75 // # of ICMP flood pkts sniffed per sec
10 #endif

#ifdef UDP_NF_SNIFF
#define UDP_NF_SNIFF 75 // # of non-frag UDP flood pkts sniffed per sec
15 #endif

#ifdef UDP_F_SNIFF
#define UDP_F_SNIFF 75 // # of frag UDP flood pkts sniffed per sec
20 #endif

#include "if.click"

#include "sampler.click"

#include "sniffer.click"
ds_sniffer :: Sniffer(mazu_ds);
25 syn_sniffer :: Sniffer(mazu_syn);
tcp_sniffer :: Sniffer(mazu_tcp);
ntcp_sniffer :: Sniffer(mazu_ntcp);

#include "synkill.click"
30 #ifdef MONITOR
tcpsynkill :: SYNKill(true);
#else
tcpsynkill :: SYNKill(false);
#endif
35

//
// discards suspicious packets
//

40 #include "ds.click"
ds :: DetectSuspicious(01);

from_world -> ds;
45 ds [0] -> is_tcp_to_victim :: IPClassifier(tcp, -);

```

```

    #ifdef MONITOR
    ds [1] -> ds_split :: RatedSampler(SUSP_SNIFF);
    #else
    ds [1] -> ds_split :: RatedSplitter(SUSP_SNIFF);
5    #endif

    ds_split [1] -> ds_sniffer;
    ds_split [0]
    #ifdef MONITOR
10    -> is_tcp_to_victim;
    #else
    -> Discard;
    #endif

15    //
    // monitor TCP ratio
    //

    #include "monitor.click"
20    tcp_ratemon :: TCPTrafficMonitor;

    is_tcp_to_victim [0] -> tcp_monitor :: TCPMonitor -> [0] tcp_ratemon;
    from_victim -> is_tcp_to_world :: IPClassifier(tcp, -);
    is_tcp_to_world [0] -> [1] tcp_ratemon;
25    //
    // enforce correct TCP ratio
    //

30    check_tcp_ratio :: RatioShaper(1,2,40,0.2);
    tcp_ratemon [0] -> check_tcp_ratio;

    #ifdef MONITOR
    check_tcp_ratio [1] -> tcp_split :: RatedSampler(TCP_SNIFF);
35    #else
    check_tcp_ratio [1] -> tcp_split :: RatedSplitter(TCP_SNIFF);
    #endif

    tcp_split [1] -> tcp_sniffer;
40    tcp_split [0]
    #ifdef MONITOR
    -> [0] tcpsynkill;
    #else
    -> Discard;
45    #endif

```

```

//
// prevent SYN bomb
//

5  check_tcp_ratio [0] -> [0] tcpsynkill;
   tcp_ratemon [1] -> [1] tcpsynkill;

   tcpsynkill [0] -> to_victim_s1;
   tcpsynkill [1] -> to_world;
10  tcpsynkill [2]
   #ifdef MONITOR
       -> syn_sniffer;
   Idle -> to_victim_prio;
15  #else
       -> tcpsynkill_split :: Tee(2)
   tcpsynkill_split [0] -> to_victim_prio;
   tcpsynkill_split [1] -> syn_sniffer;
   #endif
20
   //
   // monitor all non TCP traffic
   //

25  ntcp_ratemon :: IPRateMonitor(PACKETS, 0, 1, 100, 4096, false);
   is_tcp_to_victim [1] -> ntcp_monitor :: NonTCPMonitor -> ntcp_t :: Tee(2);
   ntcp_t [0] -> [0] ntcp_ratemon [0] -> Discard;
   ntcp_t [1] -> [1] ntcp_ratemon;

30  //
   // rate limit ICMP traffic
   //

   ntcp_ratemon [1] -> is_icmp :: IPClassifier(icmp, -);
35  is_icmp [0] -> icmp_split :: RatedSplitter (ICMP_RATE);

   icmp_split [1] -> to_victim_s2;
   icmp_split [0] -> icmp_sample :: RatedSampler (ICMP_SNIFF);

40  icmp_sample [1] -> ntcp_sniffer;
   icmp_sample [0]
   #ifdef MONITOR
       -> to_victim_s2;
   #else
45  -> Discard;
   #endif

```

```

//
// rate limit other non TCP traffic (mostly UDP)
//

5  is_icmp [1] -> is_frag :: Classifier(6/0000, -);

    is_frag [0] -> udp_split :: RatedSplitter (UDP_NF_RATE);

    udp_split [0] -> udp_sample :: RatedSampler (UDP_NF_SNIFF);
10  udp_sample [1] -> ntcp_sniffer;
    udp_sample [0]
    #ifdef MONITOR
        -> to_victim_s2;
    #else
15    -> Discard;
    #endif

    is_frag [1] -> udp_f_split :: RatedSplitter (UDP_F_RATE);

20  udp_f_split [0] -> udp_f_sample :: RatedSampler (UDP_F_SNIFF);
    udp_f_sample [1] -> ntcp_sniffer;
    udp_f_sample [0]
    #ifdef MONITOR
        -> to_victim_s2;
25  #else
        -> Discard;
    #endif

//
30  // further shape non-TCP traffic with ICMP dest unreachable packets
//

    is_tcp_to_world [1] -> is_icmp_unreach :: IPClassifier(icmp type 3, -);
    is_icmp_unreach [1] -> to_world;
35  is_icmp_unreach [0]
        -> icmp_unreach_counter :: Counter;

    #ifndef MONITOR

40  icmp_unreach_counter -> icmperr_sample :: RatedSampler (UNREACH_SNIFF);
    icmperr_sample [1] -> ntcp_sniffer;
    icmperr_catcher :: AdaptiveShaper(.1, 50);
    udp_split [1] -> [0] icmperr_catcher [0] -> to_victim_s2;
    udp_f_split [1] -> [0] icmperr_catcher;
45  icmperr_sample [0] -> [1] icmperr_catcher [1] -> to_world;

```

```

#else

udp_split [1] -> to_victim_s2;
udp_f_split [1] -> to_victim_s2;
5 icmp_unreach_counter [0] -> to_world;

#endif

10 == if.click


---


//
// input/output ethernet interface for router
15 //
// this configuration file leaves the following elements to be hooked up:
//
// from_victim: packets coming from victim
// from_world: packets coming from world
20 // to_world: packets going to world
// to_victim_prio: high priority packets going to victim
// to_victim_s1: best effort packets going to victim, tickets = 4
// to_victim_s2: best effort packets going to victim, tickets = 1
//
25 // see bridge.click for a simple example of how to use this configuration.

// victim network is 1.0.0.0/8 (eth1, 00:C0:95:E2:A8:A0)
// world network is 2.0.0.0/8 (eth2, 00:C0:95:E2:A8:A1) and
// 3.0.0.0/8 (eth3, 00:C0:95:E1:B5:38)
30 // ethernet input/output, forwarding, and arp machinery

tol :: ToLinux;
t :: Tee(6);
35 t[5] -> tol;

arpq1_prio :: ARPQuerier(1.0.0.1, 00:C0:95:E2:A8:A0);
arpq1_s1 :: ARPQuerier(1.0.0.1, 00:C0:95:E2:A8:A0);
arpq1_s2 :: ARPQuerier(1.0.0.1, 00:C0:95:E2:A8:A0);
40 ar1 :: ARPResponder(1.0.0.1/32 00:C0:95:E2:A8:A0);
arpq2 :: ARPQuerier(2.0.0.1, 00:C0:95:E2:A8:A1);
ar2 :: ARPResponder(2.0.0.1/32 00:C0:95:E2:A8:A1);
arpq3 :: ARPQuerier(3.0.0.1, 00:C0:95:E1:B5:38);
ar3 :: ARPResponder(3.0.0.1/32 00:C0:95:E1:B5:38);
45

```

```

psched :: PrioSched;
ssched :: StrideSched (4,1);

5  out1_s1 :: Queue(256) -> [0] ssched;
   out1_s2 :: Queue(256) -> [1] ssched;
   out1_prio :: Queue(256) -> [0] psched;
   ssched -> [1] psched;
   psched[0] -> to_victim_counter :: Counter -> todev1 :: ToDevice(eth1);

10  out2 :: Queue(1024) -> todev2 :: ToDevice(eth2);
   out3 :: Queue(1024) -> todev3 :: ToDevice(eth3);

   to_victim_prio :: Counter -> tvpc :: Classifier(16/01, -);
   tvpc [0] -> [0]arpq1_prio -> out1_prio;
15  tvpc [1] -> Discard;

   to_victim_s1 :: Counter -> tvs1c :: Classifier(16/01, -);
   tvs1c [0] -> [0]arpq1_s1 -> out1_s1;
   tvs1c [1] -> Discard;
20  to_victim_s2 :: Counter -> tvs2c :: Classifier(16/01, -);
   tvs2c [0] -> [0]arpq1_s2 -> out1_s2;
   tvs2c [1] -> Discard;

25  to_world :: Counter -> twc :: Classifier(16/02, 16/03, -);
   twc [0] -> [0]arpq2 -> out2;
   twc [1] -> [0]arpq3 -> out3;
   twc [2] -> Discard;

30  from_victim :: GetIPAddress(16);
   from_world :: GetIPAddress(16);

   indevl :: PollDevice(eth1);
   c1 :: Classifier (12/0806 20/0001,
35  12/0806 20/0002,
   12/0800,
   -);
   indevl -> from_victim_counter :: Counter -> c1;
   c1 [0] -> ar1 -> out1_s1;
40  c1 [1] -> t;
   c1 [2] -> Strip(14) -> MarkIPHeader -> from_victim;
   c1 [3] -> Discard;
   t[0] -> [1] arpql_prio;
   t[1] -> [1] arpql_s1;
45  t[2] -> [1] arpql_s2;

```

```

indev2 :: PollDevice(eth2);
c2 :: Classifier (12/0806 20/0001,
                  12/0806 20/0002,
                  12/0800,
5      -);
indev2 -> from_attackers_counter :: Counter -> c2;
c2 [0] -> ar2 -> out2;
c2 [1] -> t;
c2 [2] -> Strip(14) -> MarkIPHeader -> from_world;
10 c2 [3] -> Discard;
t[3] -> [1] arp2;

indev3 :: PollDevice(eth3);
c3 :: Classifier (12/0806 20/0001,
15      12/0806 20/0002,
      12/0800,
      -);
indev3 -> c3;
c3 [0] -> ar3 -> out3;
20 c3 [1] -> t;
c3 [2] -> Strip(14) -> MarkIPHeader -> from_world;
c3 [3] -> Discard;
t[4] -> [1] arp3;

25 ScheduleInfo(todev1 10, indev1 1,
               todev2 10, indev2 1,
               todev3 10, indev3 1);

30 == sampler.click

```

---

```

elementclass RatedSampler {
35   $rate |
   input -> s :: RatedSplitter($rate);
   s [0] -> [0] output;
   s [1] -> t :: Tee;
   t [0] -> [0] output;
40   t [1] -> [1] output;
};

elementclass ProbSampler {
   $prob |
45   input -> s :: ProbSplitter($prob);
   s [0] -> [0] output;

```



```

    s[1] -> t::Tee;
    t[0] -> [0] output;
    t[1] -> [1] output;
};
5  == sniffer.click
=====

// setup a sniffer device, with a testing IP network address
10 //
// argument: name of the device to setup and send packet to

elementclass Sniffer {
    $dev |
15  FromLinux($dev, 192.0.2.0/24) -> Discard;

    input -> sniffer_ctr::Counter
        -> ToLinuxSniffers($dev);
};
20 // note: ToLinuxSniffers take 2 us

== synkill.click
=====

25 //
// SYNKill
//
// argument: true if monitor only, false if defend
30 //
// expects: input 0 - TCP packets with IP header to victim network
//          input 1 - TCP packets with IP header to rest of internet
//
// action: protects against SYN flood by prematurely finishing the three way
35 // handshake protocol.
//
// outputs: output 0 - TCP packets to victim network
//          output 1 - TCP packets to rest of internet
//          output 2 - control packets (created by TCPSYNProxy) to victim
40 //

elementclass SYNKill {
    $monitor |
    // TCPSYNProxy(MAX_CONNS, THRESH, MIN_TIMEOUT, MAX_TIMEOUT,
45  PASSIVE);
    tcpsynproxy::TCPSYNProxy(128, 4, 8, 80, $monitor);

```

```

    input [0] -> [0] tcpsynproxy [0] -> [0] output;
    input [1] -> [1] tcpsynproxy [1] -> [1] output;
    tcpsynproxy [2]
    -> GetIPAddress(16)
5    -> [2] output;
};

== ds.click
=====
10 //
    // DetectSuspicious
    //
    // argument: takes in the victim network address and mask. for example:
15 //   DetectSuspicious(121A0400%FFFFFF00)
    //
    // expects: IP packets.
    //
    // action: detects packets with bad source addresses;
20 //   detects direct broadcast packets;
    //   detects ICMP redirects.
    //
    // outputs: output 0 push out accepted packets, unmodified;
    //   output 1 push out rejected packets, unmodified.
25 //

elementclass DetectSuspicious {
    $vnet |

30 // see http://www.ietf.org/internet-drafts/draft-manning-dsua-03.txt for a
    // list of bad source addresses to block out. we also block out packets with
    // broadcast dst addresses.

    bad_addr_filter :: Classifier(
35    12/$vnet,          // port 0: victim network address
    12/00,              // port 1: 0.0.0.0/8 (special purpose)
    12/7F,              // port 2: 127.0.0.0/8 (loopback)
    12/0A,              // port 3: 10.0.0.0/8 (private network)
    12/AC10%FFFO,       // port 4: 172.16.0.0/12 (private network)
40    12/C0A8,           // port 5: 192.168.0.0/16 (private network)
    12/A9FE,            // port 6: 169.254.0.0/16 (autoconf addr)
    12/C0000200%FFFFFF00, // port 7: 192.0.2.0/24 (testing addr)
    12/E0%F0,           // port 8: 224.0.0.0/4 (class D - multicast)
    12/F0%F0,           // port 9: 240.0.0.0/4 (class E - reserved)
45    12/00FFFFFF%00FFFFFF, // port 10: broadcast saddr X.255.255.255

```

```

    12/0000FFFF%0000FFFF,    // port 11: broadcast saddr X.Y.255.255
    12/000000FF%000000FF,    // port 12: broadcast saddr X.Y.Z.255
    16/00FFFFFF%00FFFFFF,    // port 13: broadcast daddr X.255.255.255
    16/0000FFFF%0000FFFF,    // port 14: broadcast daddr X.Y.255.255
5   16/000000FF%000000FF,    // port 15: broadcast daddr X.Y.Z.255
    9/01,                    // port 16: ICMP packets
    -);

    input -> bad_addr_filter;
10   bad_addr_filter [0] -> [1] output;
    bad_addr_filter [1] -> [1] output;
    bad_addr_filter [2] -> [1] output;
    bad_addr_filter [3] -> [1] output;
    bad_addr_filter [4] -> [1] output;
15   bad_addr_filter [5] -> [1] output;
    bad_addr_filter [6] -> [1] output;
    bad_addr_filter [7] -> [1] output;
    bad_addr_filter [8] -> [1] output;
    bad_addr_filter [9] -> [1] output;
20   bad_addr_filter [10] -> [1] output;
    bad_addr_filter [11] -> [1] output;
    bad_addr_filter [12] -> [1] output;
    bad_addr_filter [13] -> [1] output;
    bad_addr_filter [14] -> [1] output;
25   bad_addr_filter [15] -> [1] output;

    // ICMP rules: drop all fragmented and redirect ICMP packets

    bad_addr_filter [16]
30   -> is_icmp_frag_packets :: Classifier(6/0000, -);
    is_icmp_frag_packets [1] -> [1] output;

    is_icmp_frag_packets [0]
    -> is_icmp_redirect :: IPClassifier(icmp type 5, -);
35   is_icmp_redirect [0] -> [1] output;

    // finally, allow dynamic filtering of bad src addresses we discovered
    // elsewhere in our script.

40   dyn_saddr_filter :: AddrFilter(SRC, 32);
    is_icmp_redirect [1] -> dyn_saddr_filter;
    bad_addr_filter [17] -> dyn_saddr_filter;
    dyn_saddr_filter [0] -> [0] output;
    dyn_saddr_filter [1] -> [1] output;
45   };

```

## APPENDIX B

Appendix listing of additional Click modules ("elements").

ADAPTIVESHAPER(n)

ADAPTIVESHAPER(n)

5

NAME

AdaptiveShaper - Click element

SYNOPSIS

10 AdaptiveShaper(DROP\_P, REPRESS\_WEIGHT)

PROCESSING TYPE

Push

15 DESCRIPTION

AdaptiveShaper is a push element that shapes input traffic from input port 0 to output port 0. Packets are shaped based on "repressive" traffic from input port 1 to output port 1. Each repressive packet increases a multiplicative factor  $f$  by REPRESS\_WEIGHT. Each input packet is killed instead of pushed out with  $f * DROP\_P$  probability. After each dropped packet,  $f$  is decremented by 1.

20

25 EXAMPLES

ELEMENT HANDLERS

drop\_prob (read/write)  
value of DROP\_P

30

repress\_weight (read/write)  
value of REPRESS\_WEIGHT

35

SEE ALSO

40 PacketShaper(n), RatioShaper(n)

45

50

55

== monitor.click

---

```

//
5 // TCPTrafficMonitor
//
// expects: input 0 takes TCP packets w IP header for the victim network;
//         input 1 takes TCP packets w IP Header from the victim network.
// action: monitors packets passing by
10 // outputs: output 0 - packets for victim network, unmodified;
//          output 1 - packets from victim network, unmodified.
//
elementclass TCPTrafficMonitor {
15 // fwd annotation = rate of src_addr, rev annotation = rate of dst_addr
tcp_rm :: IPRateMonitor(PACKETS, 0, 1, 100, 4096, true);

// monitor all TCP traffic to victim, monitor non-RST packets from victim
input [0] -> [0] tcp_rm [0] -> [0] output;
20 input [1] -> i1_tcp_rst :: IPClassifier(rst, -);
i1_tcp_rst[0] -> [1] output;
i1_tcp_rst[1] -> [1] tcp_rm [1] -> [1] output;
};

25

```

30 20094505.doc

## APPENDIX B

ADAPTIVESPLITTER(n)

ADAPTIVESPLITTER(n)

## NAME

5 AdaptiveSplitter - Click element

## SYNOPSIS

AdaptiveSplitter(RATE)

## 10 PROCESSING TYPE

Push

## DESCRIPTION

15 AdaptiveSplitter attempts to split RATE number of packets per second for each address. It takes the fwd\_rate annotation set by IPRateMonitor(n), and calculates a split probability based on that rate. The split probability attempts to guarantee RATE number of packets per second. That is, the lower the fwd\_rate, the higher the split probability.

20 Split packets are on output port 1. Other packets are on output port 0.

## 25 EXAMPLES

AdaptiveSplitter(10);

## 30

## SEE ALSO

IPRateMonitor(n)

## 35

## 40

## 45

## 50

## APPENDIX B

	ADDRFILTER(n)	ADDRFILTER(n)
	NAME	
5	AddrFilter - Click element	
	SYNOPSIS	
	AddrFilter(DST/SRC, N)	
10	PROCESSING TYPE	
	Push	
	DESCRIPTION	
15	Filters out IP addresses given in write handler. DST/SRC specifies which IP address (dst or src) to filter. N is the maximum number of IP addresses to filter at any time. Packets passed the filter goes to output 0. Packets rejected by the filter goes to output 1.	
20	AddrFilter looks at addresses in the IP header of the packet, not the annotation. It requires an IP header annotation ( MarkIPHeader(n)).	
25	EXAMPLES	
	AddrFilter(DST, 8)	
	Filters by dst IP address, up to 8 addresses.	
30		
	ELEMENT HANDLERS	
	table ((read))	
	Dumps the list of addresses to filter and	
35		
	add ((write))	
40	Expects a string "addr mask duration", where addr is an IP address, mask is a netmask, and duration is the number of seconds to filter packets from this IP address. If 0 is given as a duration, filtering is removed. For example, "18.26.4.0 255.255.255.0 10"	
45	would filter out all packets with dst or source address 18.26.4.* for 10 seconds. New addresses push out old addresses if more than N number of filters already exist.	
50		
	reset ((write))	
	Resets on write.	
55	SEE ALSO	
	Classifier(n), MarkIPHeader(n)	

## APPENDIX B

CIRCULARINDEX (n)

CIRCULARINDEX (n)

## NAME

5       CircularIndex - Click element; writes a timed circular index into a file.

## SYNOPSIS

10       CircularIndex

## DESCRIPTION

15       CircularIndex writes an entry into a circular index file periodically. The entry contains a 32 bit time stamp and a 64 bit offset into another file. The following functions are exported by CircularIndex.

20       int initialize(String FILE, unsigned PERIOD, unsigned WRAP) - Use FILE as the name of the circular file. Writes entry into circular file once every PERIOD number of seconds. WRAP is the number of writes before wrap around. If WRAP is 0, the file is never wrapped around.

25       void write\_entry(long long offset) - Write entry into index file. Use offset as the offset in the entry.

## SEE ALSO

30       GatherRates(n), MonitorSRC16(n)



## APPENDIX B

	ATTACKLOG(n)	ATTACKLOG(n)														
5	NAME	AttackLog - Click element; maintains a log of attack packets in SAVE_FILE.														
10	SYNOPSIS	AttackLog(SAVE_FILE, INDEX_FILE, MULTIPLIER, PERIOD)														
	PROCESSING TYPE	Agnostic														
15	DESCRIPTION	Maintains a log of attack packets in SAVE_FILE. Expects packets with ethernet headers, but with the first byte of the ethernet header replaced by an attack bitmap, set in kernel. AttackLog classifies each packet by the type of attack, and maintains an attack rate for each type of attack. The attack rate is the arrival rate of attack packets multiplied by MULTIPLIER.														
20																
25		AttackLog writes a block of data into SAVE_FILE once every PERIOD number of seconds. Each block is composed of entries of the following format:														
30		<table border="0"> <tr> <td>delimiter (0s)</td> <td>4 bytes</td> </tr> <tr> <td>time</td> <td>4 bytes</td> </tr> <tr> <td>attack type</td> <td>2 bytes</td> </tr> <tr> <td>attack rate</td> <td>4 bytes</td> </tr> <tr> <td>ip header and payload (padded)</td> <td>86 bytes</td> </tr> <tr> <td colspan="2">-----</td> </tr> <tr> <td></td> <td>100 bytes</td> </tr> </table>	delimiter (0s)	4 bytes	time	4 bytes	attack type	2 bytes	attack rate	4 bytes	ip header and payload (padded)	86 bytes	-----			100 bytes
delimiter (0s)	4 bytes															
time	4 bytes															
attack type	2 bytes															
attack rate	4 bytes															
ip header and payload (padded)	86 bytes															
-----																
	100 bytes															
35		Entries with the same attack type are written out together. A delimiter of 0xFFFFFFFF is written to the end of each block.														
40		A circular timed index file is kept in INDEX_FILE along side the attacklog. See CircularIndex(n).														
45	SEE ALSO	CircularIndex(n)														

## APPENDIX B

	DISCARDTODEVICE(n)	DISCARDTODEVICE(n)
	NAME	
5	DiscardToDevice - Click element; drops all packets. gives skbs to device.	
	SYNOPSIS	
	DiscardToDevice(DEVICE)	
10	PROCESSING TYPE	
	Agnostic	
	DESCRIPTION	
15	Discards all packets received on its single input. Gives all skbuffs to specified device.	
20		

## APPENDIX B

	FILTERTCP(n)	FILTERTCP(n)
	NAME	
5	FilterTCP - Click element	
	SYNOPSIS	
	FilterTCP()	
10	PROCESSING TYPE	
	Push	
	DESCRIPTION	
15	Expects TCP/IP packets as input.	

## APPENDIX B

	FROMTUNNEL(n)	FROMTUNNEL(n)
	NAME	
5	FromTunnel - Click element	
	SYNOPSIS	
	FromTunnel(TUNNEL, SIZE, BURST)	
10	PROCESSING TYPE	
	Push	
	DESCRIPTION	
15	Grab packets from kernel KUTunnel element. TUNNEL is a /proc file in the handler directory of the KUTunnel element. SIZE specifies size of the buffer to use (if packet in kernel has larger size, it is dropped). BURST specifies the maximum number of packets to push each time FromTunnel runs.	
20		
	EXAMPLES	
	FromTunnel(/proc/click/tunnel/config)	
25		

## APPENDIX B

	GATHERRATES (n)	GATHERRATES (n)
5	NAME	
	GatherRates - Click element	
	SYNOPSIS	
	GatherRates(SAVE_FILE, INDEX_FILE, TCPMONITOR_IN, TCPMONI-	
	TOR_OUT, MONITOR_PERIOD, SAVE_PERIOD);	
10	PROCESSING TYPE	
	Agnostic	
	DESCRIPTION	
15	Gathers aggregate traffic rates from TCPMonitor(n) element	
	at TCPMONITOR_IN and TCPMONITOR_OUT.	
	Aggregate rates are gathered once every MONITOR_PERIOD	
	number of seconds. They are averaged and saved to	
20	SAVE_FILE once every SAVE_PERIOD number of seconds. The	
	following entry is written to SAVE_FILE for both incoming	
	and outgoing traffic:	
	delimiter (0s)	4 bytes
25	time	4 bytes
	type (0 for incoming traffic, 1 for outgoing traffic)	4 bytes
	packet rate of tcp traffic	4 bytes
	byte rate of tcp traffic	4 bytes
	rate of fragmented tcp packets	4 bytes
30	rate of tcp syn packets	4 bytes
	rate of tcp fin packets	4 bytes
	rate of tcp ack packets	4 bytes
	rate of tcp rst packets	4 bytes
	rate of tcp psh packets	4 bytes
35	rate of tcp urg packets	4 bytes
	packet rate of non-tcp traffic	4 bytes
	byte rate of non-tcp traffic	4 bytes
	rate of fragmented non-tcp traffic	4 bytes
	rate of udp packets	4 bytes
40	rate of icmp packets	4 bytes
	rate of all other packets	4 bytes
	-----	
	---	72 bytes
45	After the two entries, an additional delimiter of	
	0xFFFFFFFF is written. SAVE_PERIOD must be a multiple of	
	MONITOR_PERIOD.	
50	A circular timed index is kept along side the stats file.	
	See CircularIndex(n).	
55	SEE ALSO	
	TCPMonitor(n) CircularIndex(n)	

## APPENDIX B

ICMPPINGENCAP(n)

ICMPPINGENCAP(n)

## NAME

5 ICMPPINGEncap - Click element

## SYNOPSIS

ICMPPINGEncap(SADDR, DADDR [, CHECKSUM?])

## 10 DESCRIPTION

Encapsulates each incoming packet in a ICMP ECHO/IP packet with source address SADDR and destination address DADDR. The ICMP and IP checksums are calculated if CHECKSUM? is true; it is true by default.

15

## EXAMPLES

ICMPPINGEncap(1.0.0.1, 2.0.0.2)

20

## APPENDIX B

	KUTUNNEL(n)	KUTUNNEL(n)
5	NAME	KUTunnel - Click element; stores packets in a FIFO queue that userlevel Click elements pull from.
10	SYNOPSIS	KUTunnel([CAPACITY])
	PROCESSING TYPE	Push
15	DESCRIPTION	Stores incoming packets in a first-in-first-out queue. Drops incoming packets if the queue already holds CAPACITY packets. The default for CAPACITY is 1000. Allows user-level elements to pull from queue via ioctl.
20	ELEMENT HANDLERS	
	length (read-only)	Returns the current number of packets in the queue.
25		
	highwater_length (read-only)	Returns the maximum number of packets that have ever been in the queue at once.
30		
	capacity (read/write)	Returns or sets the queue's capacity.
35		
	drops (read-only)	Returns the number of packets dropped so far.
40		
45	SEE ALSO	Queue(n)

## APPENDIX B

```

    . LOGGER(n)                                LOGGER(n)

NAME
5   Logger - Click element

SYNOPSIS
    Logger(LOGFILE, INDEXFILE [, LOCKFILE, COMPRESS?, LOGSIZE,
10  PACKETSIZE, WRITEPERIOD, IDXCOALESC, PACKETFREQ, MAXBUF-
        SIZE ] )

PROCESSING TYPE
    Agnostic

15 DESCRIPTION
    Has one input and one output.

    Write packets to log file LOGFILE. A log file is a circular
    buffer containing packet records of the following
20 form:

            -----
            | time (6 bytes)      |
            | length (2 bytes)   |
25         | packet data       |
            -----

Time is the number of seconds and milliseconds since the Epoch at which a given packet was seen. Length is the
30 length (in bytes) of the subsequent logged packet data. One or more packet records constitute one packet sequence.

INDEXFILE maintains control data for LOGFILE. It contains a sequence of sequence control blocks of the following
35 form:

            -----
            | date (4 bytes)     |
            | offset (sizeof off_t) |
40         | length (sizeof off_t) |
            -----

Date is a number of seconds since the Epoch. Offset points to the beginning of the packet sequence, i.e. to
45 the earliest packet record having a time no earlier than date. Length is the number of bytes in the packet sequence. IDXCOALESC is the number of coalescing packets that a control block always cover. Default is 1024.

50 Sequence control blocks are always stored in increasing chronological order; offsets need not be in increasing order, since LOGFILE is a circular buffer.

55 COMPRESS? (true, false) determines whether packet data is logged in compressed form. Default is true.
```



## APPENDIX B

LOGSIZE specifies the maximum allowable log file size, in KB. Default is 2GB. LOGSIZE=0 means "grow as necessary".

5       PACKETSIZE is the amount of packet data stored in the log. By default, the first 120 (128-6-2) bytes are logged and the remainder is discarded. Note that PACKETSIZE is the amount of data logged before compression.

10       Packet records are buffered in memory and periodically written to LOGFILE as a packet sequence. WRITEPERIOD is the number of seconds that should elapse between writes to LOGFILE. Default is 60. INDEXFILE is updated every time a sequence of buffered packet records is written to LOGFILE. The date in the sequence control block is the time of the first packet record of the sequence, with milliseconds omitted.

15       PACKETFREQ is an estimate of the number of packets per second that will be passing through Logger. Combined with WRITEPERIOD, this is a hint of buffer memory requirements. By default, PACKETFREQ is 1000. Since by default WRITEPERIOD is 60 and each packet record is at most 128 bytes, Logger normally allocates 7500KB of memory for the buffer. Logger will grow the memory buffer as needed up to a maximum of MAXBUFSIZE KB, at which point the buffered packet records are written to disk even if WRITEPERIOD seconds have not elapsed since the last write. Default MAXBUFSIZE is 65536 (64MB).

30

## APPENDIX B

```

MONITORSRC16(n)
MONITORSRC16(n)

NAME
5   MonitorSRC16 - Click element

SYNOPSIS
    MonitorSRC16(SAVE_FILE, INDEX_FILE, MULTIPLIER, PERIOD,
    WRAP)

10  PROCESSING TYPE
    Agnostic

DESCRIPTION
15  Examines src address of packets passing by. Collects
    statistics for each 16 bit IP address prefix. The follow-
    ing data structure is written to SAVE_FILE for every 16
    bit IP address prefix every PERIOD number of seconds.

20      delimiter (0s)                (4 bytes)
        time                        (4 bytes)
        addr                        (4 bytes)
        tcp rate                     (4 bytes)
        non tcp rate                 (4 bytes)
25      percent of tcp                (1 byte)
        percent of tcp frag          (1 byte)
        percent of tcp syn           (1 byte)
        percent of tcp fin           (1 byte)
        percent of tcp ack           (1 byte)
30      percent of tcp rst            (1 byte)
        percent of tcp psh           (1 byte)
        percent of tcp urg           (1 byte)
        percent of non tcp frag      (1 byte)
        percent of udp               (1 byte)
35      percent of icmp               (1 byte)
        reserved                     (1 byte)
        -----
                                32 bytes

40  TCP and non TCP rates are multiplied by MULTIPLIER. An
    additional delimiter of 0xFFFFFFFF is written at the end
    of a block of entries.

45  WARP specifies the number of writes before wrap-around.
    For example, if PERIOD is 60, WARP is 5, then every 5 min-
    utes, the stats file wrap around.

50  A timed circular index is maintained along side the
    statistics file in INDEX_FILE. See CircularIndex(n).

SEE ALSO
    CircularIndex(n)
55

```

## APPENDIX B

RANDOMTCPIPENCAP (n)

RANDOMTCPIPENCAP (n)

## NAME

5 RandomTCPIPEncap - Click element

## SYNOPSIS

RandomTCPIPEncap(DA BITS [DP SEQN ACKN CHECKSUM SA MASK])

## 10 PROCESSING TYPE

Agnostic

## DESCRIPTION

15 Encapsulates each incoming packet in a TCP/IP packet with  
random source address and source port, destination address  
DA, and control bits BITS. If BITS is -1, control bits  
are also generated randomly. If destination port DP,  
sequence number SEQN, or ack number ACKN is specified and  
non-zero, it is used. Otherwise, it is generated randomly  
20 for each packet. IP and TCP checksums are calculated if  
CHECKSUM is true; it is true by default. SEQN and ACKN  
should be in host order. SA and MASK are optional IP  
address; if they are specified, the source address is com-  
puted as ((random() & MASK) | SA).

25

## EXAMPLES

RandomTCPIPEncap(1.0.0.2 4)

30

## SEE ALSO

RoundRobinTCPIPEncap(n), RandomUDPIPEncap(n)

35

## APPENDIX B

RANDOMUDPIPECAP(n)

RANDOMUDPIPECAP(n)

5     NAME           RandomUDPIPEncap - Click element

      SYNOPSIS  
      RandomUDPIPEncap(SADDR SPORT DADDR DPORT PROB [CHECKSUM?]  
      [, ...])

10    PROCESSING TYPE  
      Agnostic

      DESCRIPTION

15    Encapsulates each incoming packet in a UDP/IP packet with  
      source address SADDR, source port SPORT, destination  
      address DADDR, and destination port DPORT. The UDP check-  
      sum is calculated if CHECKSUM? is true; it is true by  
      default.

20    PROB gives the relative chance of this argument be used  
      over others.

      The RandomUDPIPEncap element adds both a UDP header and an  
      IP header.

25    You can a maximum of 16 arguments. Each argument specifies  
      a single UDP/IP header. The element will randomly pick one  
      argument. The relative probabilities are determined by  
      PROB.

30    The Strip(n) element can be used by the receiver to get  
      rid of the encapsulation header.

35    EXAMPLES  
      RandomUDPIPEncap(1.0.0.1 1234 2.0.0.2 1234 1 1,  
      1.0.0.2 1093 2.0.0.2 1234 2 1)

40    Will send about twice as much UDP/IP packets with 1.0.0.2  
      as its source address than packets with 1.0.0.1 as its  
      source address.

45    SEE ALSO  
      Strip(n), UDPIPEncap(n), RoundRobinUDPIPEncap(n)

## APPENDIX B

RATEWARN(n)

RATEWARN(n)

## NAME

5       RateWarn - Click element; classifies traffic and sends out warnings when rate of traffic exceeds specified rate.

## SYNOPSIS

10       RateWarn(RATE, WARNFREQ)

## PROCESSING TYPE

Push

## DESCRIPTION

15       RateWarn has three output ports. It monitors the rate of packet arrival on input port 0. Packets are forwarded to output port 0 if rate is below RATE. If rate exceeds RATE, it sends out a warning packet WARNFREQ number of seconds apart on output port 2 in addition to forwarding all traffic through output port 1.

20

## SEE ALSO

25       PacketMeter(n)

## APPENDIX B

	RATIOSHAPER(n)	RATIOSHAPER(n)
	NAME	
5	RatioShaper - Click element	
	SYNOPSIS	
	RatioShaper(FWD_WEIGHT, REV_WEIGHT, THRESH, P)	
10	PROCESSING TYPE	
	Push	
	DESCRIPTION	
15	RatioShaper shapes packets based on fwd_rate_anno and rev_rate_anno rate annotations set by IPRateMonitor(n). If either annotation is greater than THRESH, and $FWD\_WEIGHT * fwd\_rate\_anno > REV\_WEIGHT * rev\_rate\_anno$ , the packet is moved onto output port 1 with a probability of	
20	$\min(1, P * (fwd\_rate\_anno * FWD\_WEIGHT) / (rev\_rate\_anno * REV\_WEIGHT))$	
25	FWD_WEIGHT, REV_WEIGHT, and THRESH are integers. P is a decimal between 0 and 1. Otherwise, packet is forwarded on output port 0.	
	EXAMPLES	
30	RatioShaper(1, 2, 100, .2);	
35	if fwd_rate_anno more than twice as big as rev_rate_anno, and both rates are above 100, drop packets with an initial probability of 20 percent.	
	ELEMENT HANDLERS	
40	fwd_weight (read/write) value of FWD_WEIGHT	
45	rev_weight (read/write) value of REV_WEIGHT	
50	thresh (read/write) value of THRESH	
55	drop_prob (read/write) value of P	
	SEE ALSO	
	Block(n), IPRateMonitor(n)	

## APPENDIX B

	REPORTACTIVITY (n)	REPORTACTIVITY (n)
	NAME	
5	ReportActivity - Click element	
	SYNOPSIS	
	ReportActivity(SAVE_FILE, IDLE)	
10	PROCESSING TYPE	
	Agnostic	
	DESCRIPTION	
15	Write into SAVE_FILE a 32 bit time value followed by an ASCII representation of that time stamp whenever a packet comes by. If IDLE number of seconds pass by w/o a packet, removes the file.	
20		

## APPENDIX B

ROUNDROBINSETIPADDRESS (n)

ROUNDROBINSETIPADDRESS (n)

## NAME

5 RoundRobinSetIPAddress - Click element

## SYNOPSIS

RoundRobinSetIPAddress(ADDR [, ...])

## 10 PROCESSING TYPE

Agnostic

## DESCRIPTION

15 Set the destination IP address annotation of each packet with an address chosen from the configuration string in round robin fashion. Does not compute checksum (use SetIPChecksum(n) or SetUDPTCPChecksum(n)) or encapsulate the packet with headers (use RoundRobinUDPIPEncap(n) or RoundRobinTCPIPEncap(n) with bogus address).

20

## EXAMPLES

25 RoundRobinUDPIPEncap(2.0.0.2 0.0.0.0 0 0 0)  
 -> RoundRobinSetIPAddress(1.0.0.2, 1.0.0.3, 1.0.0.4)  
 -> StoreIPAddress(12)  
 -> SetIPChecksum  
 -> SetUDPTCPChecksum

30 this configuration segment places an UDP header onto each packet, with randomly generated source and destination ports. The destination IP address is 2.0.0.2, the source IP address is 1.0.0.2, or 1.0.0.3, or 1.0.0.4. Both IP and UDP checksum are computed.

35

## SEE ALSO

40 RoundRobinUDPIPEncap(n), RoundRobinTCPIPEncap(n), UDPIPEncap(n), SetIPChecksum(n), SetUDPTCPChecksum(n), SetIPAddress(n), StoreIPAddress(n)



## APPENDIX B

ROUNDROBINTCPIPCAP (n)

ROUNDROBINTCPIPENCAP (n)

NAME \_\_\_\_\_

5 RoundRobinTCPIPEncap - Click element

## SYNOPSIS

```
RoundRobinTCPIPEncap(SA DA BITS [SP DP SEQN ACKN CHECKSUM]
[, ...])
```

10

PROCESSING TYPE

**Agnostic**

### DESCRIPTION

15       Encapsulates each incoming packet in a TCP/IP packet with  
source address SA, source port SP (if 0, a random one is  
generated for each packet), destination address DA, and  
destination port DP (if 0, a random one is generated for  
each packet), and control bits BITS. If SEQN and ACKN  
20       specified are non-zero, they are used. Otherwise, they  
are randomly generated for each packet. IP and TCP check-  
sums are calculated if CHECKSUM is true; it is true by  
default. SEQN and ACKN should be in host order.

25       The RoundRobinTCPIPEncap element adds both a TCP header  
and an IP header.

30 You can give as many arguments as you'd like. Each argument specifies a single TCP/IP header. The element will cycle through the headers in round-robin order.

The Strip(n) element can be used by the receiver to get rid of the encapsulation header.

## 35 EXAMPLES

```
RoundRobinTCPIPEncap(2.0.0.2 1.0.0.2 4 1022 1234 42387492
2394839 1,
                        2.0.0.2 1.0.0.2 2)
```

40

**SEE ALSO**

Strip(n), RoundRobinUDPIPEncap(n)

45

## APPENDIX B

ROUNDROBINUDPIPECAP (n)

ROUNDROBINUDPIPECAP (n)

5     NAME           RoundRobinUDPIPEncap - Click element

10    SYNOPSIS  
       RoundRobinUDPIPEncap(SADDR DADDR [SPORT DPORT CHECKSUM?]  
       [, ...])

10    PROCESSING TYPE  
       Agnostic

15    DESCRIPTION  
       Encapsulates each incoming packet in a UDP/IP packet with  
       source address SADDR, source port SPORT, destination  
       address DADDR, and destination port DPORT. The UDP and IP  
       checksums are calculated if CHECKSUM? is true; it is true  
       by default. If either DPORT or SPORT is 0, the port will  
       be randomly generated for each packet.

20       The RoundRobinUDPIPEncap element adds both a UDP header  
       and an IP header.

25       You can give as many arguments as you'd like. Each argu-  
       ment specifies a single UDP/IP header. The element will  
       cycle through the headers in round-robin order.

30       The Strip(n) element can be used by the receiver to get  
       rid of the encapsulation header.

35    EXAMPLES  
       RoundRobinUDPIPEncap(2.0.0.2 1.0.0.2 1234 1002 1,  
       2.0.0.2 1.0.0.2 1234)

40    SEE ALSO  
       Strip(n), UDPIPEncap(n)

## APPENDIX B

	SETUDPTCPCHECKSUM(n)	SETUDPTCPCHECKSUM(n)
	NAME	
5	SetUDPTCPChecksum - Click element	
	SYNOPSIS	
	SetUDPTCPChecksum()	
10	PROCESSING TYPE	
	Agnostic	
	DESCRIPTION	
15	Expects an IP packet as input. Calculates the ICMP, UDP or TCP header's checksum and sets the checksum header field. Does not modify packet if it is not an ICMP, UDP, or TCP packet.	
20	SEE ALSO	
	SetIPChecksum(n)	

## APPENDIX B

	SETSNIFFFLAGS (n)	SETSNIFFFLAGS (n)
	NAME	
5	SetSniffFlags - Click element; sets sniff flags annotation.	
	SYNOPSIS	
	SetSniffFlags(FLAGS [, CLEAR])	
10	PROCESSING TYPE	
	Agnostic	
	DESCRIPTION	
15	Set the sniff flags annotation of incoming packets to FLAGS bitwise or with the old flags. if CLEAR is true (false by default), the old flags are ignored.	
20		

## APPENDIX B

	STORESNIFFFLAGS (n)	STORESNIFFFLAGS (n)
	NAME	
5	StoreSniffFlags - Click element; stores sniff flags annotation in packet	
	SYNOPSIS	
	StoreSniffFlags(OFFSET)	
10	PROCESSING TYPE	
	Agnostic	
	DESCRIPTION	
15	Copy the sniff flags annotation into the packet at offset OFFSET.	

## APPENDIX B

	TCPMONITOR(n)	TCPMONITOR(n)
	NAME	
5	TCPMonitor - Click element	
	SYNOPSIS	
	TCPMonitor()	
10	PROCESSING TYPE	
	Push	
	DESCRIPTION	
15	Monitors and splits TCP traffic. Output 0 are TCP traffic, output 1 are non-TCP traffic. Keeps rates of TCP, TCP BYTE, SYN, ACK, PUSH, RST, FIN, URG, and fragmented packets. Also keeps rates of ICMP, UDP, non-TCP BYTE, and non-TCP fragmented traffic.	
20	ELEMENT HANDLERS	
	rates (read)	
	dumps rates	
25		

## APPENDIX B

	TCPSYNPROXY (n)	TCPSYNPROXY (n)
5	NAME	TCPSYNProxy - Click element
10	SYNOPSIS	TCPSYNProxy(MAX_CONNS, THRESHOLD, MIN_TIMEOUT, MAX_TIMEOUT [, PASSIVE])
	PROCESSING TYPE	Push
15	DESCRIPTION	Help setup a three way TCP handshake from A to B by supplying the last ACK packet to the SYN ACK B sent prematurely, and send RST packets to B later if no ACK was received from A.
20		Expects IP encapsulated TCP packets, each with its ip header marked ( MarkIPHeader(n) or CheckIPHeader(n)).
25		Aside from responding to SYN ACK packets from B, TCPSYNProxy also examines SYN packets from A. When a SYN packet from A is received, if there are more than MAX_CONNS number of outstanding 3 way connections per destination (daddr + dport), reject the SYN packet. If MAX_CONNS is 0, no maximum is set.
30		The duration from sending an ACK packet to B to sending a RST packet to B decreases exponentially as the number of outstanding connections to B increases pass $2^{\text{THRESHOLD}}$ . The minimum timeout is MIN_TIMEOUT. If the number of outstanding half-open connections is above $2^{\text{THRESHOLD}}$ , the timeout is
35		$\max(\text{MIN\_TIMEOUT}, \text{MAX\_TIMEOUT} \gg (N \gg \text{THRESHOLD}))$
40		Where N is the number of outstanding half-open connections. For example, let the MIN_TIMEOUT value be 4 seconds, the MAX_TIMEOUT value be 90 seconds, and THRESHOLD be 3. Then when $N < 8$ , timeout is 90. When $N < 16$ , timeout is 45. When $N < 24$ , timeout is 22 seconds. When $N < 32$ , timeout is 11 seconds. When $N < 64$ , timeout is 4 seconds.
45		Timeout period does not decrement if the threshold is 0.
50		TCPSYNProxy has two inputs, three outputs. All inputs and outputs take in and spew out packets with IP header. Input 0 expects TCP packets from A to B. Input 1 expects TCP packets from B to A. Output 0 spews out packets from A to B. Output 1 spews out packets from B to A. Output 2 spews out the ACK and RST packets generated by the element.
55		If PASSIVE is true (it is not by default), monitor TCP three-way handshake instead of actively setting it up. In

## APPENDIX B

this case, no ACK or RST packets will be sent. When an outstanding SYN times out, the SYN ACK packet is sent out of output port 2. No packets on port 0 are modified or dropped in this operating mode.

5

## EXAMPLES

... -> CheckIPHeader() -> TCPSYNProxy(128,3,10,90) -> ...

10

## ELEMENT HANDLERS

15

summary (read)

Returns number of ACK and RST packets sent and number of SYN packets rejected.

20

table (read)

Dumps the table of half-opened connections.

25

reset (write)

Resets on write.

30

## SEE ALSO

MarkIPHeader(n), CheckIPHeader(n)

35



## APPENDIX B

	TCPSYNRESP (n)	TCPSYNRESP (n)
	NAME	
5	TCPSYNResp - Click element	
	SYNOPSIS	
	TCPSYNResp()	
10	PROCESSING TYPE	
	Push	
	DESCRIPTION	
15	Takes in TCP packet, if it is a SYN packet, return a SYN ACK. This is solely for debugging and performance tuning purposes. No checksum is done. Spews out original packet on output 0 untouched. Spews out new packet on output 1.	
20		
25		
	201094509.doc	

What is claimed is:

1. A gateway device disposed between a data center and a network for thwarting denial of service attacks on the data center, the gateway device comprises:
  - a computing device comprising:
    - a monitoring process that monitors network traffic through the gateway;
    - a communication process that can communicate statistics collected in the gateway from the monitoring process with a control center and that can receive queries or instructions from the control center; and
    - a filtering process to allow filters to be inserted to filter out packets that the gateway deems to be part of an attack.
2. The gateway of claim 1 wherein the communication process couples to a dedicated link to communicate with the control center over a hardened network.
3. The gateway of claim 1 wherein the monitoring process in the gateway samples network packet flow in the network.
4. The gateway of claim 1 wherein the gateway is adaptable to be physically deployed in line in the network.
5. The gateway of claim 1 wherein, the gateway is adaptable to dynamically install filters on nearby routers.

6. The gateway of claim 1 wherein the monitoring process detects IP traffic and determines levels of unusual amounts of IP fragmentation or fragmented IP packets with bad or overlapping fragment offsets.

5

7. The gateway of claim 1 wherein the monitoring process detects Internet Protocol (IP) traffic and determines levels of IP packets that have bad source addresses or Internet Control Message Protocol (ICMP) packets with  
10 broadcast destination addresses.

8. The gateway of claim 1 wherein monitoring process detects Internet Protocol (IP) traffic and determines levels of Transmission Control Protocol (TCP) or User  
15 Datagram Protocol (UDP) packets to unused ports.

9. The gateway of claim 1 wherein monitoring process detects IP traffic and determines levels of TCP segments advertising unusually small window sizes, which may  
20 indicate a load on the data center, or TCP ACK packets not belonging to a known connection.

10. The gateway of claim 1 wherein monitoring process detects sustained rate higher than plausible for a human  
25 user over a persistent HTTP connection.

11. The gateway of claim 1 wherein monitoring process maintains statistical summary information of traffic over different periods of time and at different levels of  
30 detail.

12. The gateway of claim 11 wherein monitoring process maintains statistics on parameters including source and

destination host or network addresses, protocols, types of packets, number of open connections or of packets sent in either direction.

5 13. The gateway of claim 12 wherein monitoring process has configurable thresholds and issues a warning when one of the measured parameters exceeds the corresponding threshold.

10 14. The gateway of claim 13 wherein monitoring process logs packets.

15 15. The gateway of claim 14 wherein monitoring process logs specific packets identified as part of an attack to enable an administrator to identify important properties of the attack.

16. A method of protecting a victim site during a denial of service attack, comprises:

20 disposing a gateway device between the victim site and a network;  
monitoring network traffic through the gateway and measuring heuristics of the network traffic;  
communicating statistics collected in the gateway to  
25 a control center; and  
filtering out packets that the gateway or control center deems to be part of an attack.

17. The method of claim 16 wherein communicating occurs  
30 over a dedicated link to the control center via a hardened network.

18. The method of claim 16 wherein monitoring samples network packet flow in the network.
19. The method of claim 16 wherein the gateway is  
5 physically deployed in line in the network.
20. The method of claim 16 wherein filtering further comprises:  
dynamically installing filters on nearby routers via  
10 an out of band connection.
21. The method of claim 16 wherein monitoring further comprises:  
detecting IP traffic and determining levels of  
15 unusual amounts of IP fragmentation or fragmented IP packets with bad or overlapping fragment offsets.
22. The method of claim 16 wherein monitoring further comprises:  
20 detecting Internet Protocol (IP) traffic and determining levels of IP packets that have bad source addresses or Internet Control Message Protocol (ICMP) packets with broadcast destination addresses.
- 25 23. The method of claim 16 wherein monitoring further comprises:  
detecting Internet Protocol (IP) traffic and determining levels of Transport Control Protocol (TCP) or User Datagram Protocol UDP packets to unused ports.  
30
24. The method of claim 16 wherein monitoring further comprises:

detecting IP traffic and determines levels of TCP segments advertising unusually small window sizes, which may indicate a load on the data center, or TCP ACK packets not belonging to a known connection.

5

25. The method of claim 16 wherein monitoring further comprises:

detecting a sustained rate of reload requests that is higher than plausible for a human user over a persistent

10 HTTP connection.

26. The method of claim 16 wherein monitoring further comprises:

15 logging statistics on parameters including source and destination host or network addresses, protocols, types of packets, number of open connections or of packets sent in either direction.

27. The method of claim 16 wherein monitoring further  
20 comprises:

issuing a warning to the control center when one of the measured parameters exceeds a corresponding configurable threshold.

25 28. The method of claim 16 wherein monitoring further comprises:

logging specific packets identified as part of an attack to enable an administrator to identify important properties of the attack.

29. A computer program product residing on a computer readable medium for protecting a victim site during a denial of service attack, comprises instructions for causing a computer device coupled at an entry to the site  
5 to:

monitor network traffic sent to the victim site and measuring heuristics of the network traffic;

communicate statistics collected in the computer device to a control center; and

10 filter out packets that the device or control center deems to be part of an attack.

30. The computer program product of claim 29 wherein instructions to monitor further comprise instructions to:  
15 sample network traffic flow.

31. The computer program product of claim 29 wherein instructions to filter further comprise instructions to:  
dynamically install filters on nearby routers via an  
20 out of band connection.

32. The computer program product of claim 29 wherein instructions to monitor further comprise instructions to:  
detect IP traffic; and  
25 determine levels of unusual amounts of IP fragmentation or fragmented IP packets with bad or overlapping fragment offsets.

33. The computer program product of claim 29 wherein  
30 instructions to monitor further comprise instructions to:  
detect Internet Protocol (IP) traffic; and

determine levels of IP packets that have bad source addresses or Internet Control Message Protocol (ICMP) packets with broadcast destination addresses.

- 5 34. The computer program product of claim 29 wherein instructions to monitor further comprise instructions to:  
detect Internet Protocol (IP) traffic; and  
determine levels of Transport Control Protocol (TCP) or User Datagram Protocol UDP packets to unused ports.

10

35. The computer program product of claim 29 wherein instructions to monitor further comprises instructions to:  
detect IP traffic; and  
determine levels of TCP segments advertising  
15 unusually small window sizes, which may indicate a load on the data center, or TCP ACK packets not belonging to a known connection.

36. The computer program product of claim 29 wherein  
20 instructions to monitor further comprises instructions to:  
detect a sustained rate of reload requests that is higher than plausible for a human user over a persistent HTTP connection.

- 25 37. The computer program product of claim 29 wherein instructions to monitor further comprises instructions to:  
log statistics on parameters including source and destination host or network addresses, protocols, types of packets, number of open connections or of packets sent in  
30 either direction.

38. The computer program product of claim 29 wherein instructions to monitor further comprises instructions to:



issue a warning to the control center when one of the measured parameters exceeds a corresponding configurable threshold.

- 5 39. The computer program of claim 29 further comprising instructions to cause the processor to receive communications from a control center to deliver data pertaining to the types of traffic passing through the gateway.

10

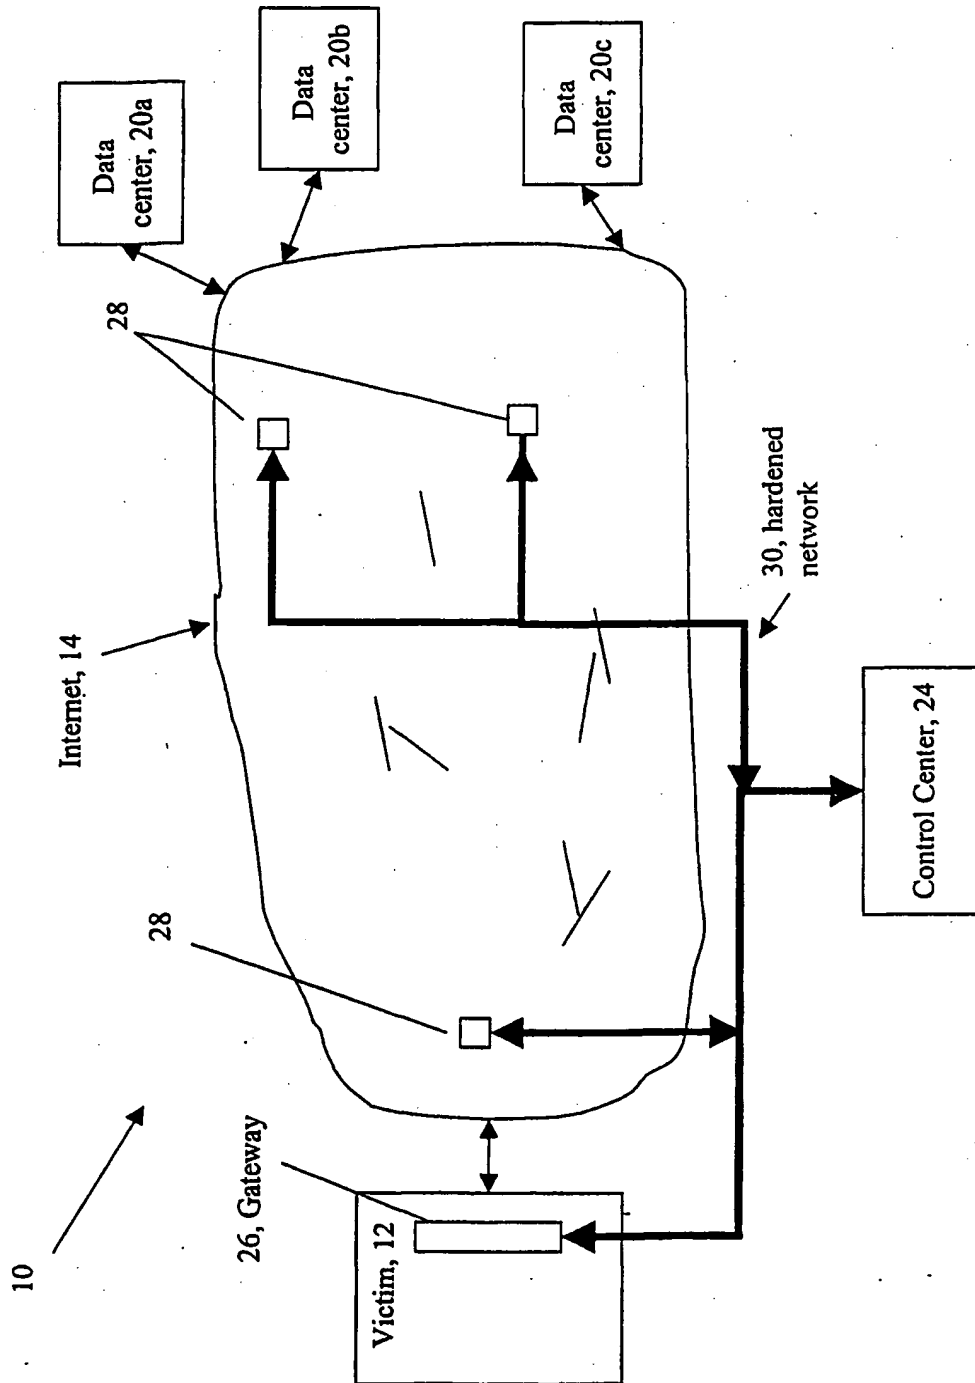


FIG. 1

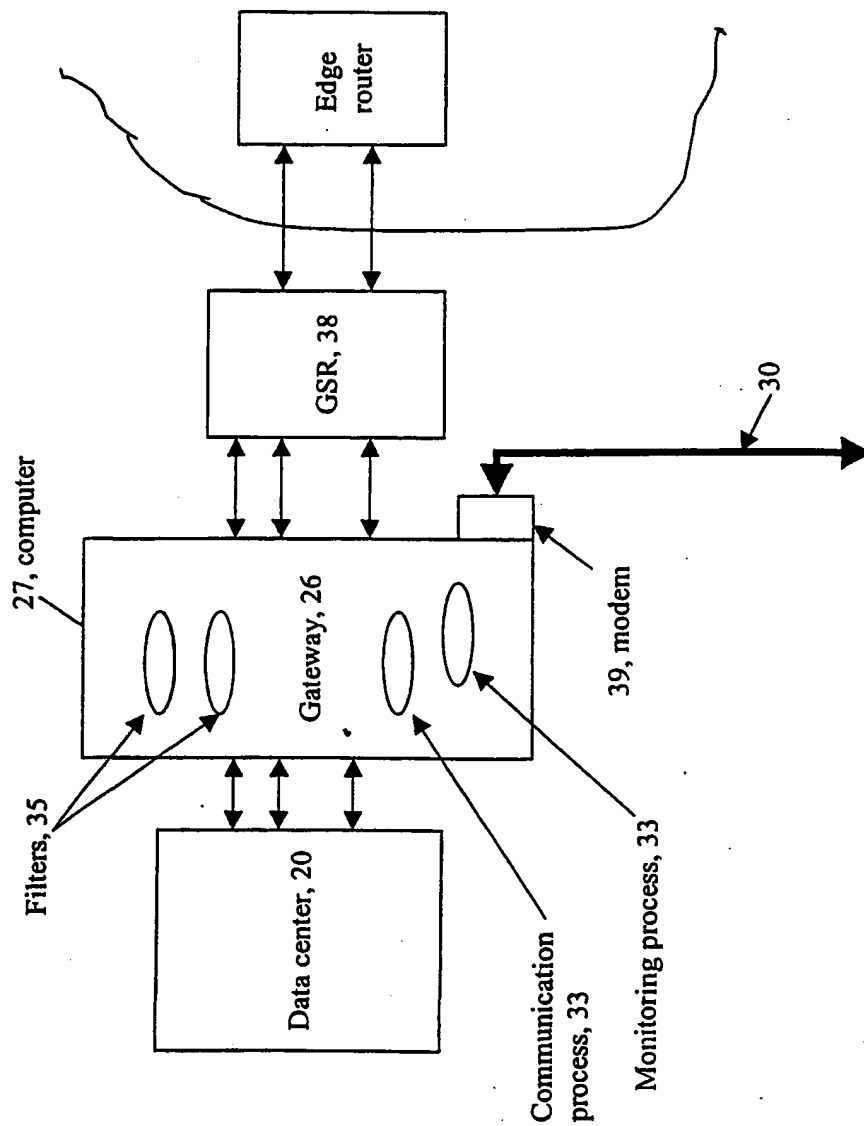


FIG. 2

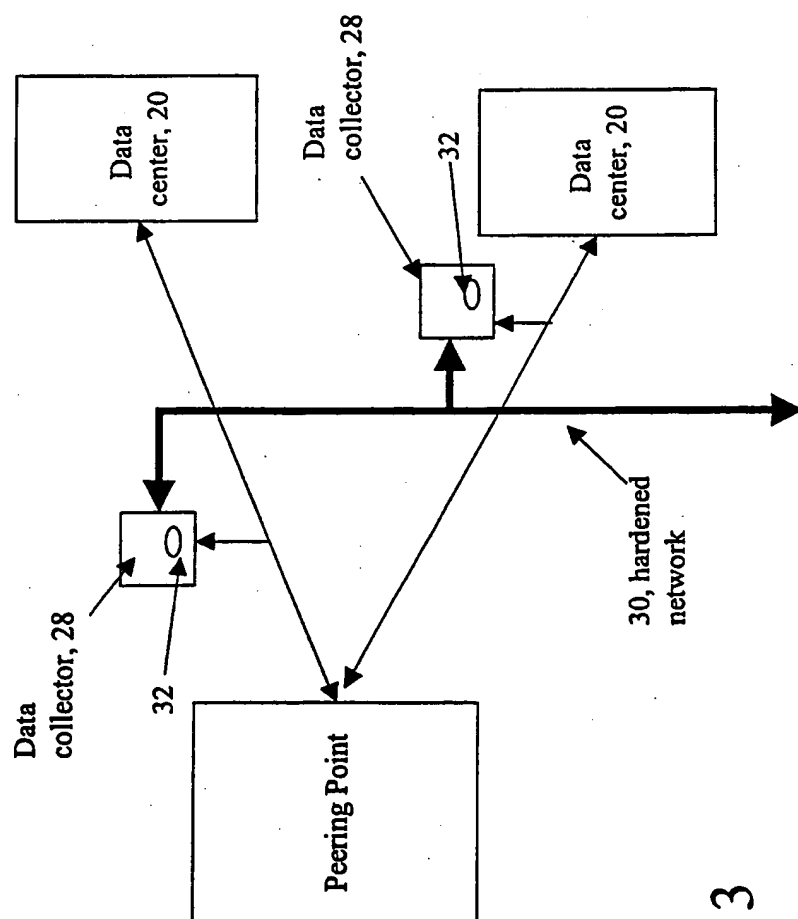


FIG. 3

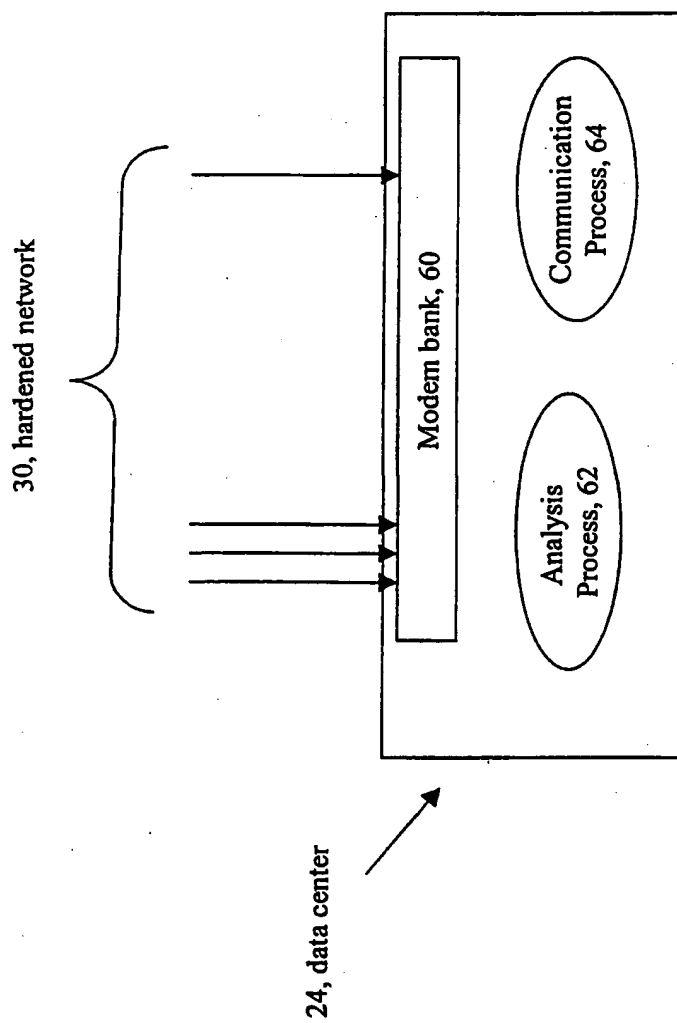


FIG. 5

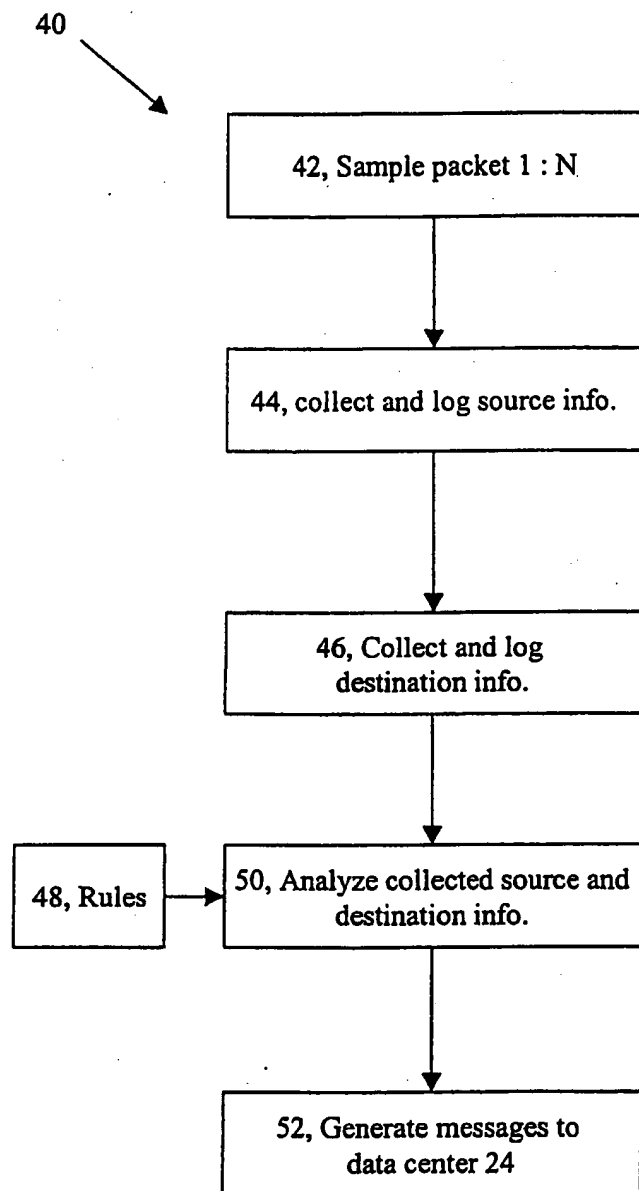
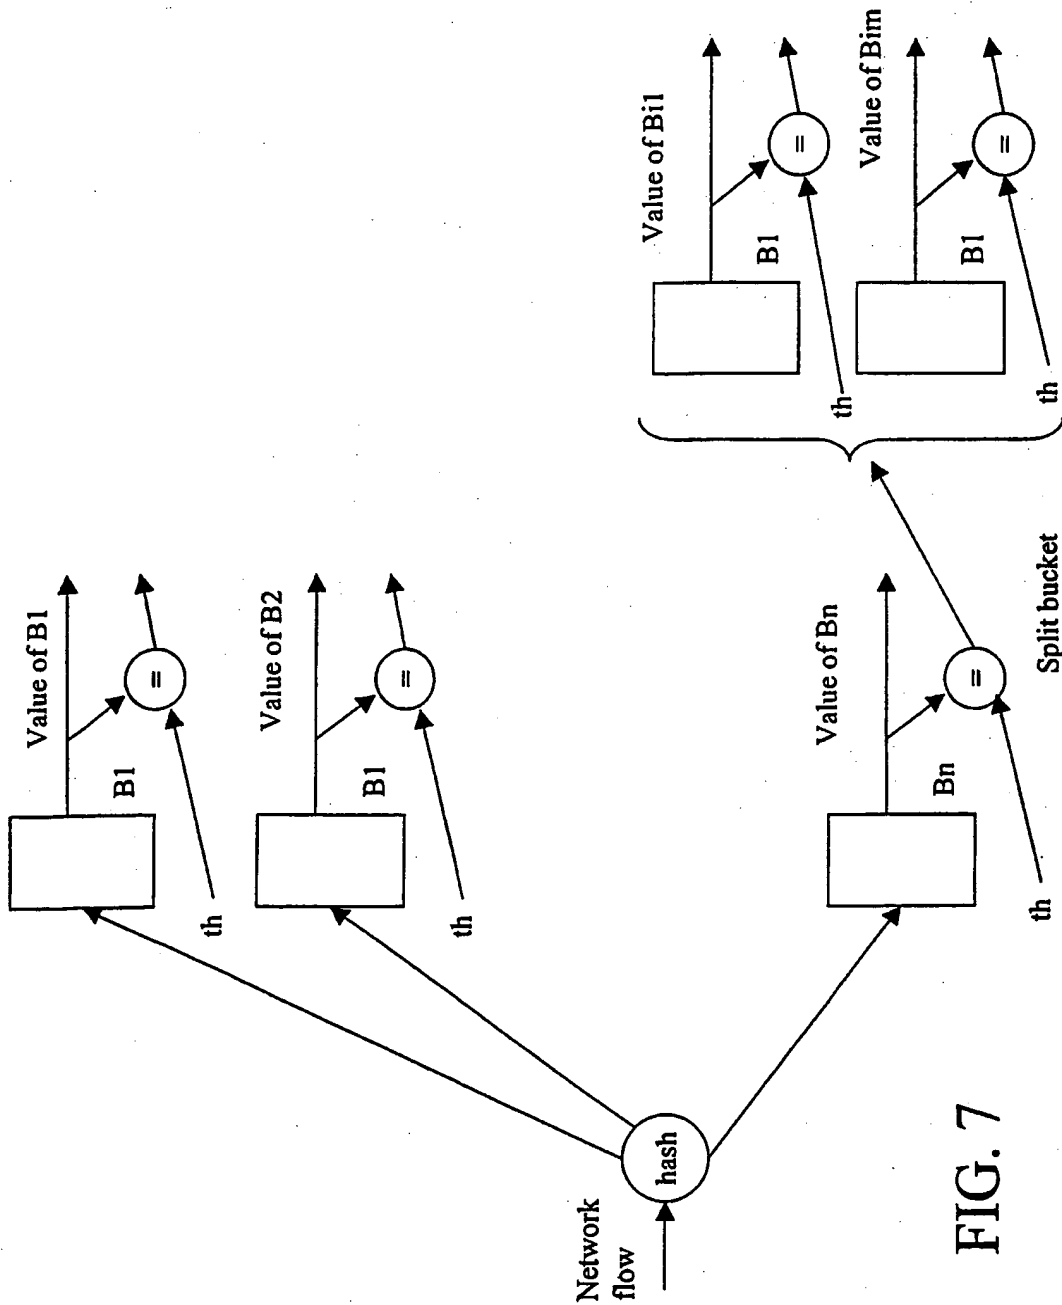


FIG. 4



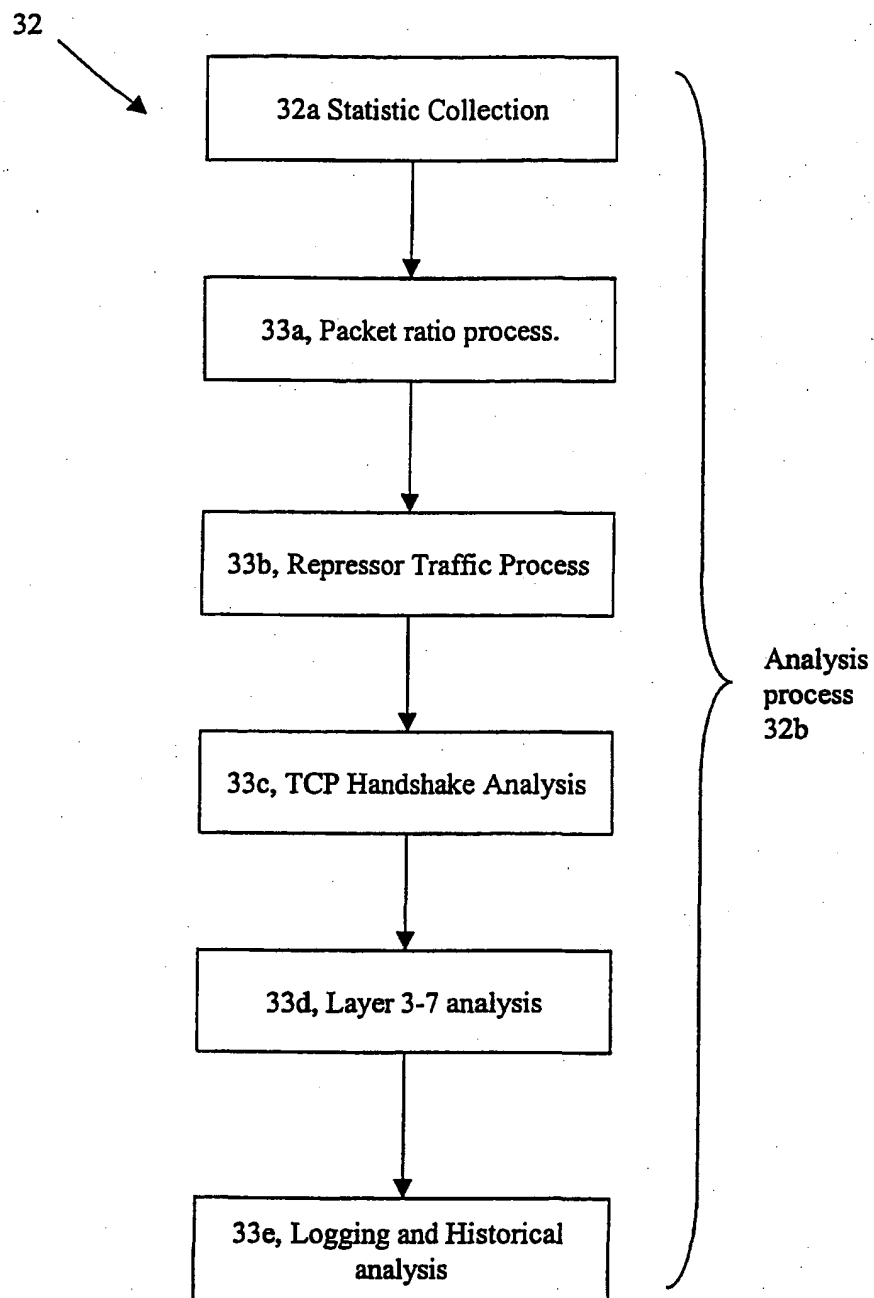


FIG. 6



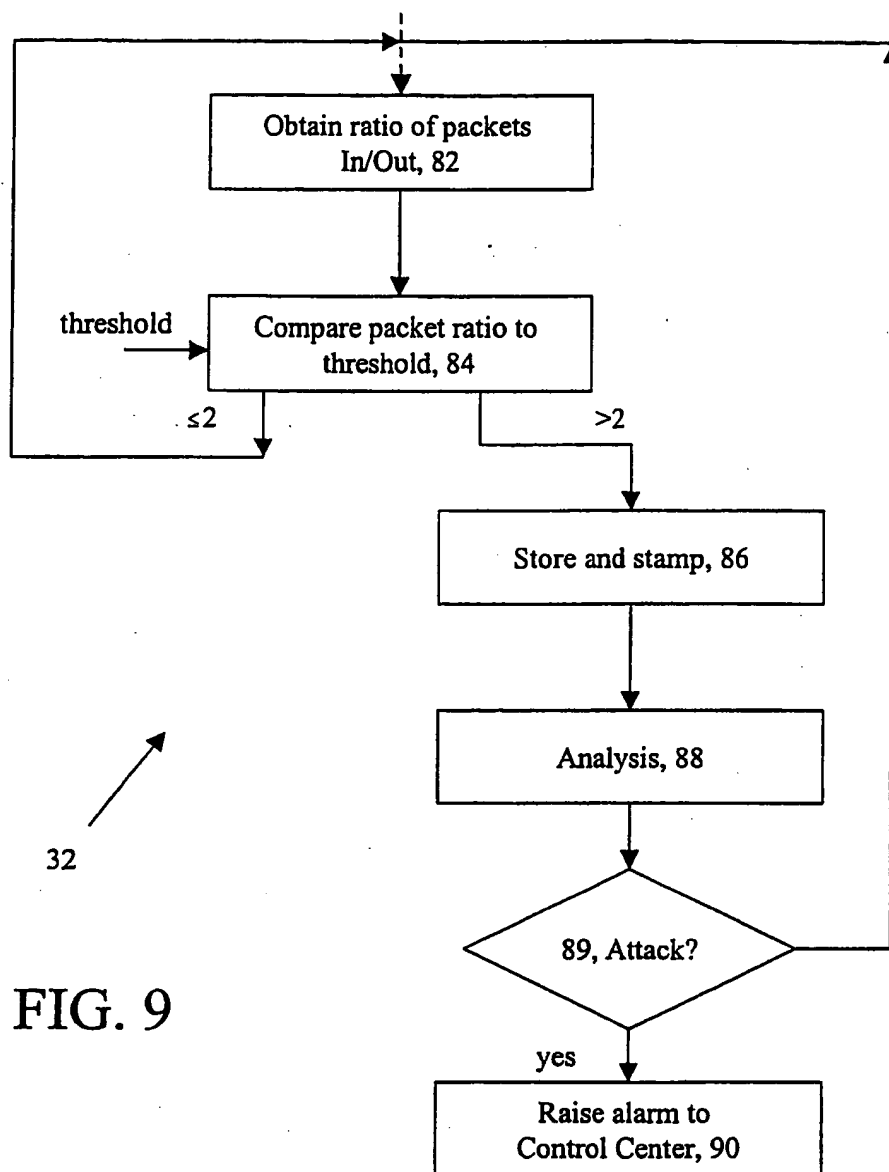
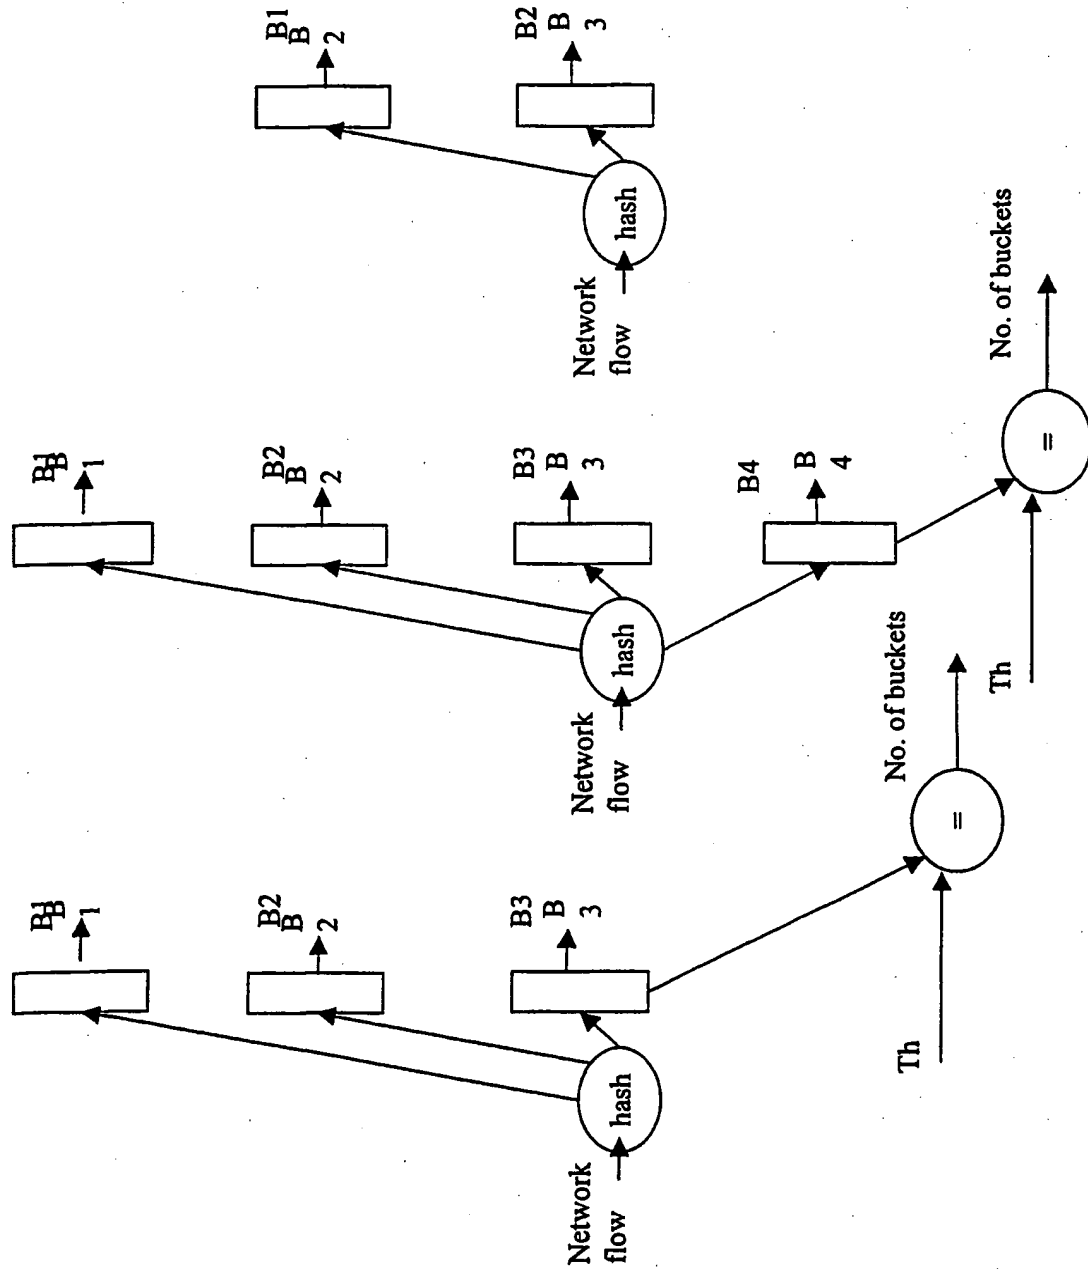


FIG. 9

FIG. 8



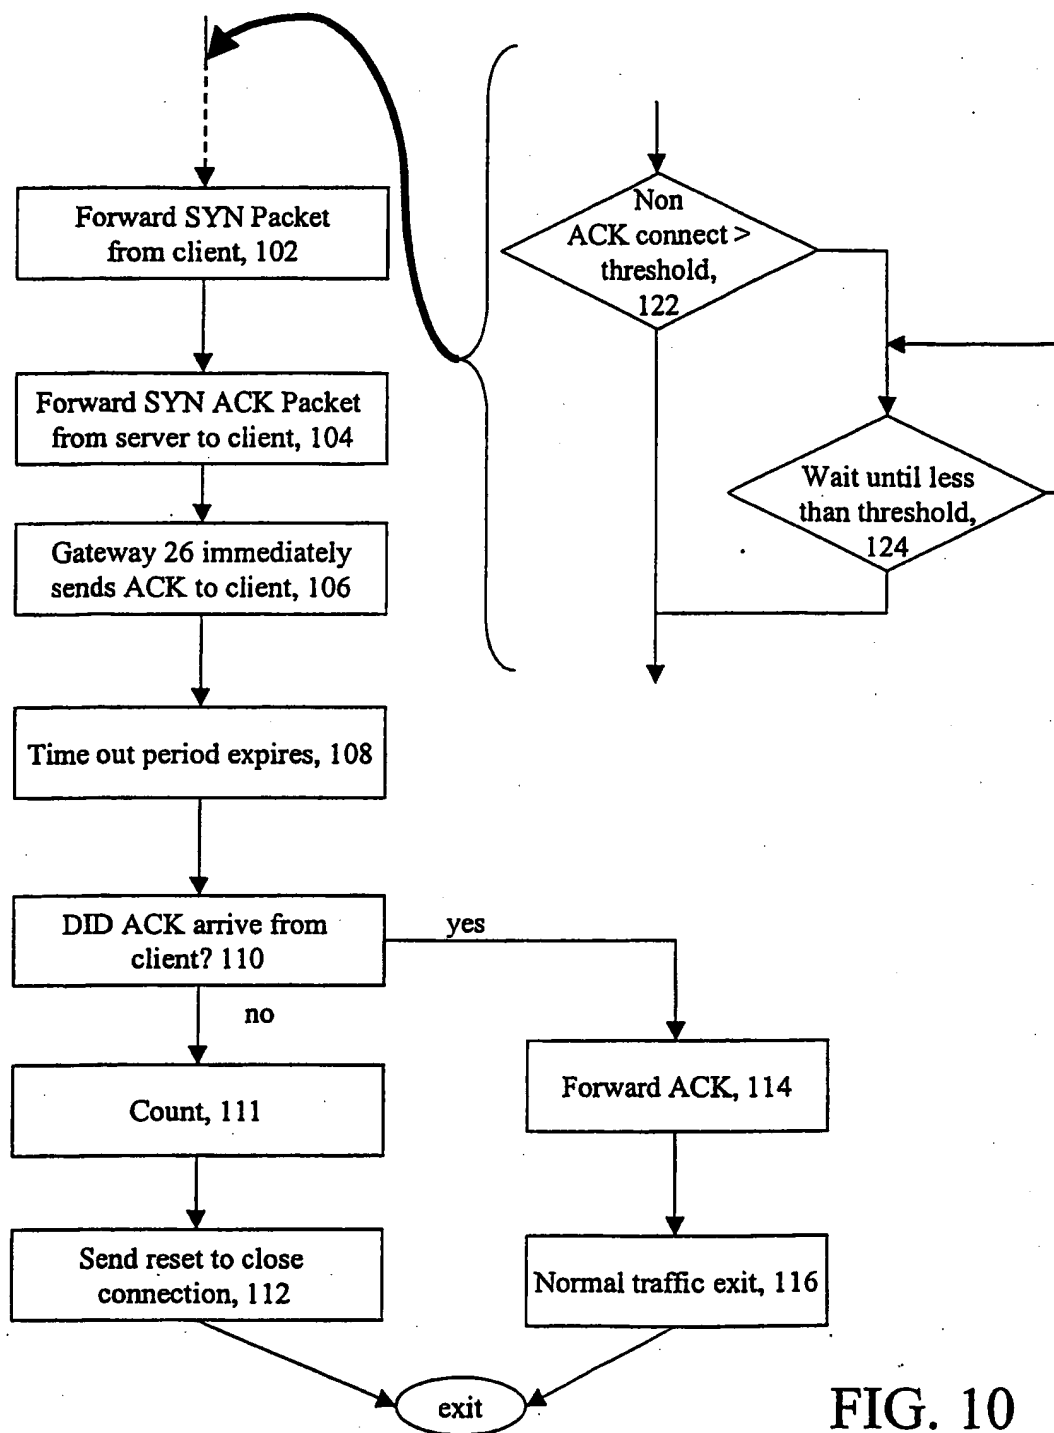


FIG. 10

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/27413

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04L, 12/00

US CL : 713/200

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 713/200, 201, 153, 154, 155, 156

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
Please See Continuation Sheet

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,968,176 A (NESSET, et al.) 19 OCTOBER 1999, see column 4, lines 21-45, column 13, lines 50 thru 14, column 16, lines 45-47 and column 17, lines 32-40.	1-39
A	US 6,128,298 A (WOOTTON, et al.) 03 OCTOBER 2000, see columns 2-4, column 7, lines 5-45 and column 8, lines 6-20.	1, 16, and 29
A	US 5,787,253 A (McCREERY, et al.) 28 JULY 1998, see columns 4-6.	1, 16, and 29



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

11/30/2001

Date of mailing of the international search report

25 JAN 2002

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

Hayes Gail

Telephone No. (703) 305-3853

*James R. Matthews*  
For

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/27413

**Continuation of B. FIELDS SEARCHED Item 3:**

WEST: gateway\$ or firewall\$ or filter\$, 11 and (track\$ or monitor\$ or log\$), 12 and network\$, 13 and filter\$, 14 and statistic\$ and packet\$, 15 and traffic\$ and link\$ and read\$

EAST: gateway\$ or filter\$ or firewall\$, 11 and (filter\$ near packet\$), 13 and statistic\$ and packet\$ and (ip or internet adj protocol\$), 14 and traffic\$